




1270 Orione

Housing: in nylon UV-stabilised, RAL 7045 grey colour.
Reflector: hammered, anodized and polished aluminium 99.85.
Diffuser: anti-glare, vandal resistant, V2 self-extinguishing, UV-stabilised matt polycarbonate.
Equipment: supplied with mounting plate.

Download

DXF 2D
- 1265.dxf
3DS
- disano_1270_orione.3ds
3DM
- disano_1270_orione.3dm

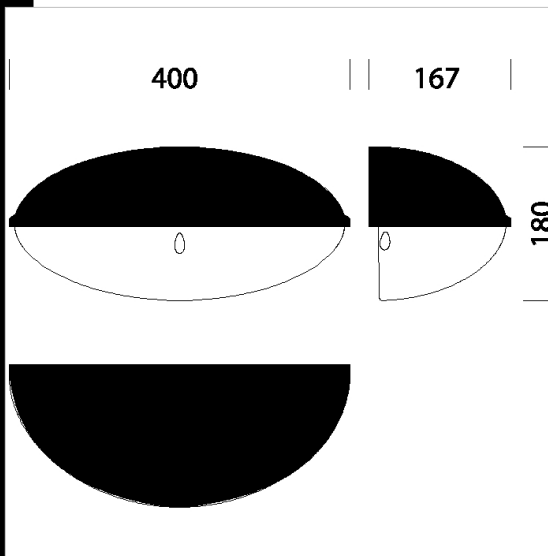

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
420680-00	CELL	1.14	FLC 2x26D-D/E-1800lm-4000K-Ra 1b	54 W	G24d-3	GRAPHITE
420681-00	CELL	1.14	FLC 2x26D-D/E-1800lm-4000K-Ra 1b	54 W	G24d-3	SANDBLASTED SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated