


1287 Garden



Housing: fibreglass nylon stabilised against UV rays.
 Reflector: Mirror finish aluminium.
 Diffuser: Satin-finish polycarbonate, non-dazzle interior, shatterproof and self-extinguishing V2, stabilised against UV rays.
 Lampholder: Made of polycarbonate and with phosphorous bronze contacts.
 Wiring: 230V/50Hz power supply. 0.50 mm² cross-section, rigid cable. 2P+T terminal strip with maximum permitted cross-section of conductors: 2.5 mm².
 Complete with: Rubber cable gland (Ø9 minimum and Ø12 maximum cable). Steel, non-loss screws. Complete with angling plate.
 Standards: Products in compliance with EN60598 - CEI 34 - 21 standards. With protection in accordance with EN60529 standards.
 Wall mounting with bracket supplied as a standard feature.

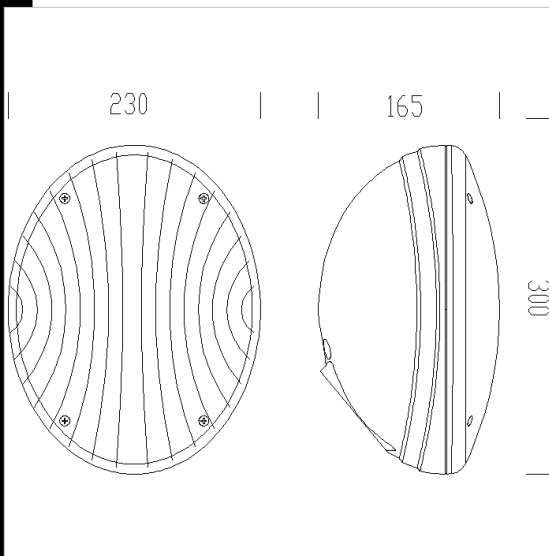

Code	Gear	Kg	Watt	Base	Lamps	Colour
420841-08	CELL	1,64	FLC 2x18L	2G11	1200lm-4000K-Ra 1b	BLACK
420841-07	CELL-E	2,30	FLC 2x18L	2G11	1200lm-4000K-Ra 1b	BLACK
420843-07	CELL-E	1,64	FLC 2x18L	2G11	1200lm-4000K-Ra 1b	SANDBLASTED SILVER
420841-00	CELL	1,64	FLC 2x18L	2G11	1200lm-4000K-Ra 1b	BLACK
420843-00	CELL	1,64	FLC 2x18L	2G11	1200lm-4000K-Ra 1b	SANDBLASTED SILVER

Accessori



- 451 wall/ceiling



- 452 mono pole connection



- 453 double pole connection

IK08	CNRL	CNRL-E
CELL		
	CE	IP65
	UV	
		CELL-E

Download

DXF 2D
- 1287.dxf

Montaggi
- 1287_garden.pdf