

Download


DXF 2D
- 1287.dxf

Montaggi
- garden 04-21.pdf



1280 Garden

Housing: fibreglass nylon stabilised against UV rays.
Reflector: Mirror finish aluminium.
Diffuser: Satin-finish polycarbonate, non-dazzle interior, shatterproof and self-extinguishing V2, stabilised against UV rays.
Complete with: Rubber cable gland (Ø9 minimum and Ø12 maximum cable). Steel, non-loss screws. Complete with angling plate.
Standards: Products in compliance with EN60598 - CEI 34 - 21 standards. With protection in accordance with EN60529 standards.
Wall mounting
with bracket supplied as a standard feature.
Luminous flux maintenance 80%: 50000h (L80B20)

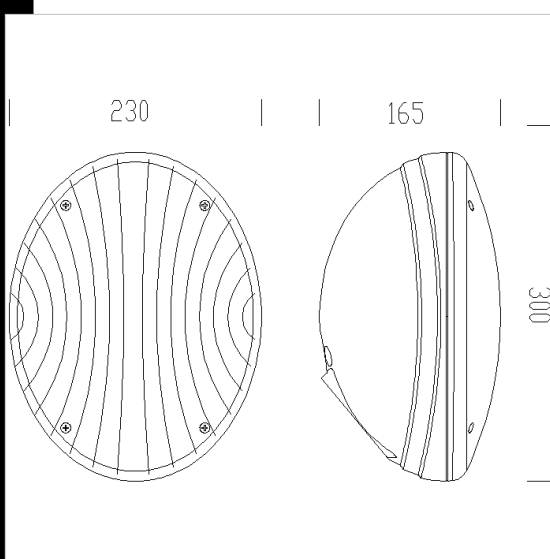

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
420845-00	CLD	1,09	LED-1439lm-4000K-CRI 80	20 W	BLACK
420846-00	CLD	1,08	LED-1439lm-4000K-CRI 80	20 W	GREY

Accessori



- 451 wall/ceiling



- 452 mono pole connection



- 453 double pole connection

Pali



- 5 fiberglass pole

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated