



Download

DXF 2D

- 1289.dxf

Montaggi

- 1289_small.pdf



1289 Small

Housing: In white vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized.

Reflector: In white vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized.

Diffuser: In anti-glare, vandal resistant and V2 self-extinguishing matt polycarbonate, UV-stabilized, smooth outside, dustproof.


Lampholder: In polycarbonate, phosphor bronze contacts. Socket G23

Electric gear: 230V/50Hz power supply. Hard wire 0.50 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards.

Nylon terminal block with maximum allowed lead cross-section of 2.5 sqmm.

Mounting: Ceiling or wall.

Regulations: Produced according to applicable IEC 60598 -1 CEI 34 - 21 standards, IP65 degree of protection according to EN 60529 standards. They can be installed on normally inflammable surfaces. Double insulation.

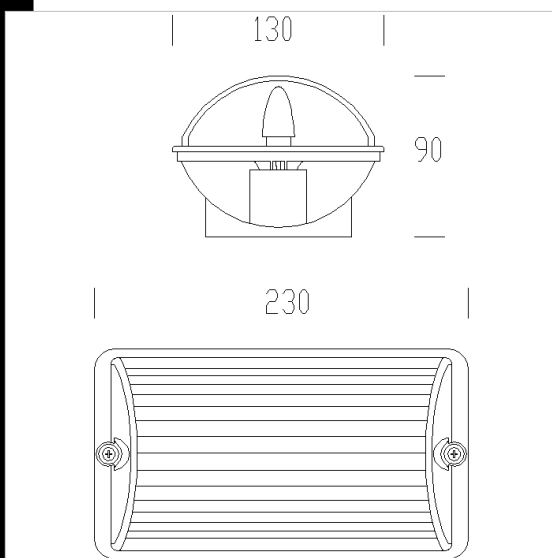

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
420850-08	CELL	0.80	FLC 2x9S-600lm-4000k-Ra 1b	19 W	G23	GREY

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated