



1560 Lord - with grid

Housing: In die-cast aluminium, complete with front frame with grid.
Reflector: Symmetric in pressed, anodized and polished 99.85 high grade aluminium, 4/6µ thick.

Diffuser: Matt or clear tempered glass, 5 mm thick, silk-screen printed, impact-resistant (UNI EN 1250-1:2001 tests).

Painting: In several stages. First stage: black epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV-stabilizing primer, and lastly rough finish with graphite acrylic coating..

Lampholder: In white polycarbonate and phosphor bronze contacts. In ceramics, with silver-plated contacts.

Electric gear: 230V/50Hz supply with thermal protection (except versions FLC/MBF/SBP). Hard wire, cross-section 0.50sqmm (FLC), PVC-HT sheath, or silicone wire terminated with quick-connection admiralty brass clamps; double fibreglass braid insulation. 2P or 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).

Supply: When the fixture is opened, the front frame remains hooked to the housing by means of nylon cords for easy maintenance.


Standard supply: When open, the front frame stays attached to the housing by means of safety springs, for easy maintenance.

Equipment: Cable gland in fiberglass nylon Ø 1/2 gas thread (cable min Ø 9 max Ø 12). Retained steel screws.

Mounting: On wall, round pole or column.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces.

Non-polluting louvre, ideal for installation in UNI10819 zone 1.

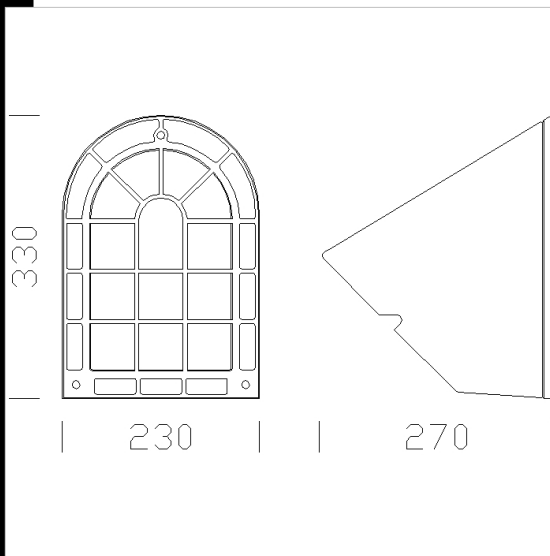

Download

- DXF 2D
- 1560lord.dxf
- 3DS
- disano_1560_lord.3ds
- 3DM
- disano_1560_lord.3dm
- Montaggi
- 89.dxf
- 85.dxf
- ap_cor.dxf
- 86.dxf
- 1560_lord.pdf

Code	Gear	Kg	Watt	Base	Lamps	Colour
421101-08	CELL	4,20	FLC 2x18L	2G11	1200lm-4000K-Ra 1b	WHITE
421103-08	CELL	4,20	FLC 2x18L	2G11	1200lm-4000K-Ra 1b	GRAPHITE
421123-00	CNR-L	5,50	SAP-T 70	E27	6000lm-2000K-Ra 4	GRAPHITE
421153-00	CNR-L	5,60	JM-TS 70	Rx7s	6500lm-4200K-Ra 1b	GRAPHITE
421121-00	CNR-L	5,50	SAP-T 70	E27	6000lm-2000K-Ra 4	WHITE
421151-00	CNR-L	5,60	JM-TS 70	Rx7s	6500lm-4200K-Ra 1b	WHITE

Accessories



- 85 plate 45°



- 89 ø60 pole mounting