




1560 Lord - with grid

Housing: In die-cast aluminium, complete with front frame with grid.
Reflector: Symmetric in pressed, anodized and polished 99.85 high grade aluminium, 4/6µ thick.
Diffuser: Matt or clear tempered glass, 5 mm thick, silk-screen printed, impact-resistant (UNI EN 1250-1:2001 tests).
Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
Lampholder: In white polycarbonate and phosphor bronze contacts. In ceramics, with silver-plated contacts.
Electric gear: 230V/50Hz supply with thermal protection (except versions FLC/MBF/SBP). Hard wire, cross-section 0.50sqmm (FLC), PVC-HT sheath, or silicone wire terminated with quick-connection admiralty brass clamps; double fibreglass braid insulation. 2P or 2P+T terminal block (maximum allowed lead cross-section: 2.5 sqmm).
Supply: When the fixture is opened, the front frame remains hooked to the housing by means of nylon cords for easy maintenance.
Standard supply: When open, the front frame stays attached to the housing by means of safety springs, for easy maintenance.
Equipment: Cable gland in fibreglass nylon Ø 1/2 gas thread (cable min Ø 9 max Ø 12). Retained steel screws.
Mounting: On wall, round pole or column.
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. These products can be installed on normally inflammable surfaces.
 Non-polluting louvre, ideal for installation in UNI10819 zone 1.

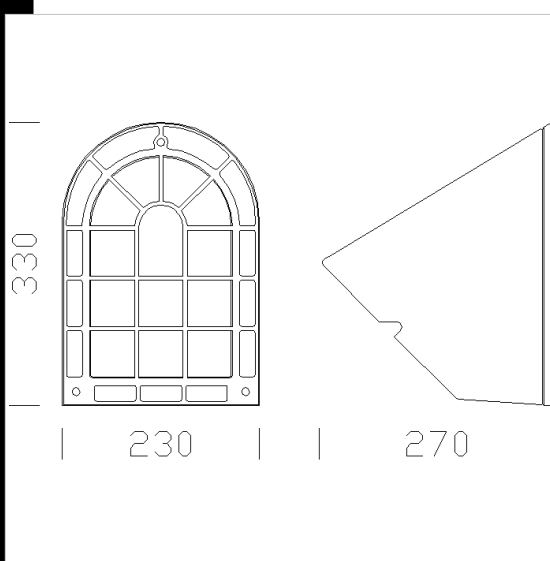

Download

- DXF 2D
- 1560lord.dxf
- 3DS
- disano_1560_lord.3ds
- 3DM
- disano_1560_lord.3dm
- Montaggi
- ap_cor_.dxf
- 86.dxf
- 1560_lord.pdf
- 85.dxf
- 89.dxf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
421153-00	CNR-L	5.60	JM-TS 70-6500lm-4200K-Ra 1b	91 W	Rx7s	GRAPHITE
421151-00	CNR-L	5.60	JM-TS 70-6500lm-4200K-Ra 1b	91 W	Rx7s	WHITE
421103-08	CELL	4.20	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GRAPHITE
421101-08	CELL	4.20	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	WHITE

Accessories



- 85 plate 45°



- 89 ø60 pole mounting

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated