

Download


DXF 2D
- 1591n.dxf
Montaggi
- HALLEY.pdf



1591 Halley LED

Housing/frame: die-cast aluminium with cooling fins. Disk: white diffusing aluminium with internal glass for improved light control. Reflector: wide beam, made of high-grade polished anodised aluminium. Glass: tempered glass protection surface, 5 mm thick, resistant to impact and thermal shock (UNI12150-1 : 2001 tests: 2001). Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

LED: Power factor 0.9. Luminous flux maintenance 80%: 80.000h (L80B20).

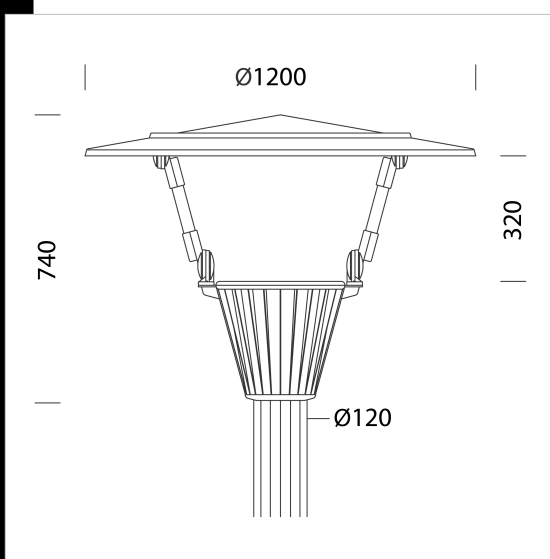

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
421830-00	CLD CELL	0,00	LED-3684lm-4000K-CRI 80	52 W	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated