

## 1214 Clima

Housing: In die-cast aluminium.

Cover: In aluminium sheet.

Diffuser: In vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized, smooth and clear both inside and outside. The diffuser houses a louvre to direct the light beam downwards.

Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Lampholder: In polycarbonate, with phosphor bronze contacts FLC. In ceramics, with silver-plated contacts.

Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross section (FLC), and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards, or silicone wire terminated with clamps in admiralty brass, with glass braid, 1.0 sqmm cross section. 2P terminal block with maximum allowed lead cross section of 2.5sqmm.

Equipment: Cable gland in fiberglass nylon Ø 1/2 gas thread (cable min Ø 9 max Ø 12). Gasket in environment-friendly material.

Mounting: On pole Ø 60 mm or arm acc. 1367 and 1362.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Isulation class II.

Wind surface: 1210 sqcm.


SAP-E70 use lamp with built-in igniter

### Download

- DXF 2D  
- 1214.dxf
- 3DS  
- disano\_1214\_clima.3ds
- 3DM  
- disano\_1214\_clima.3dm
- Montaggi  
- polar\_clima.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
422352-00	CNR-F	5,90	SAP-E 100-9500lm-2000K-Ra 4	114 W	E40	GRAPHITE
422354-00	CNRL-F	5,04	JM-E 100-9000lm-3200K-Ra 2a	114 W	E27	GRAPHITE
422351-00	CNR-F	4,56	SAP-E 70-5600lm-2000K-Ra 4	82 W	E27	GRAPHITE
422353-00	CELL-F	3,90		44 W		GRAPHITE

### Accessori

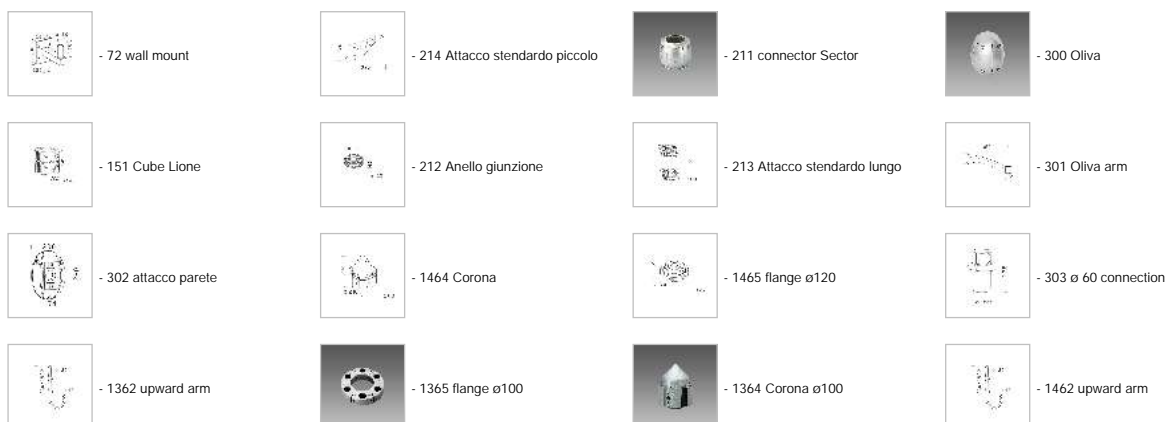

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated