



1517 Clima LED

HOUSING: in die-cast aluminium.

COVER: in aluminium plating.

DIFFUSER: in shatterproof and self-extinguishing V2 UV-stabilised polycarbonate. Smooth and clear surface both inside and outside.

COATING: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

EQUIPMENT: electronic device for automatic temperature control. In the event of unexpected temperature rise caused by particular weather conditions, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation. Complete with socket-plug connector for quick installation.

MOUNTING: suitable for poles with a diameter of 60 mm or mounting arm.

STANDARDS: manufactured pursuant to EN 60598 and with an IP65K08 degree of protection pursuant to EN 60529. Insulation class 2.

Surface exposed to wind: 1506 cm².

Luminous flux maintenance 80%: 80.000h (L80B20).

BASIC PROG (BASIC CLD) AVAILABLE FUNCTIONS

Luminous flux setup: This can be done by programming the drive current values requested when ordering/purchasing the fixture.

Upon request:

- Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments.
- with power supply 1-10 V dimmable with subcode 12.
- with virtual midnight subcode 30.
- power line carrier remote control systems subcode 0078.

Download

DXF 2D

- 1517-18.dxf

3DS

- disano_1517_clima.3ds

3DM


- disano_1517_clima.3dm

Montaggi

- polar clima 07-20.pdf


BIM

- 1517 Clima LED - 20200616.zip

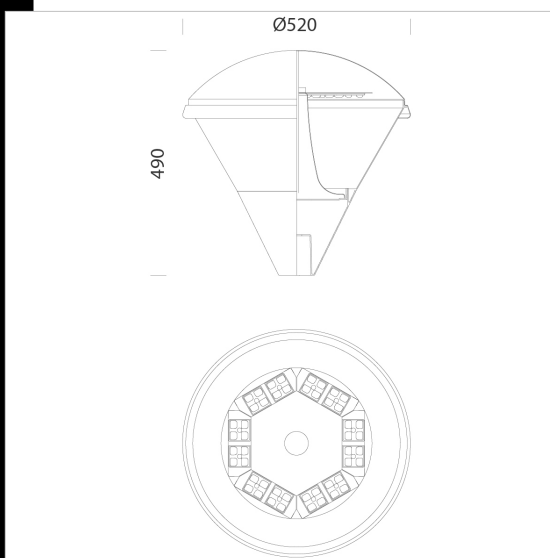

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
422372-00	CLD	4,48	LED-4392lm-4000K-CRI>70	35 W	GREY9007	6/10kV
422373-00	CLD	4,46	LED-4392lm-4000K-CRI>70	35 W	GRAPHITE	6/10kV
422370-00	CLD	5,90	LED-5551lm-4000K-CRI>70	48 W	GREY9007	6/10kV
422371-00	CLD	5,90	LED-5551lm-4000K-CRI>70	48 W	GRAPHITE	6/10kV
422372-39	CLD	3,96	LED-4084lm-3000K-CRI>70	35 W	GREY9007	6/10kV
422373-39	CLD	4,06	LED-4084lm-3000K-CRI>70	35 W	GRAPHITE	6/10kV
422370-39	CLD	5,90	LED-5162lm-3000K-CRI>70	48 W	GREY9007	6/10kV
422371-39	CLD	4,90	LED-5162lm-3000K-CRI>70	48 W	GRAPHITE	6/10kV

Accessori

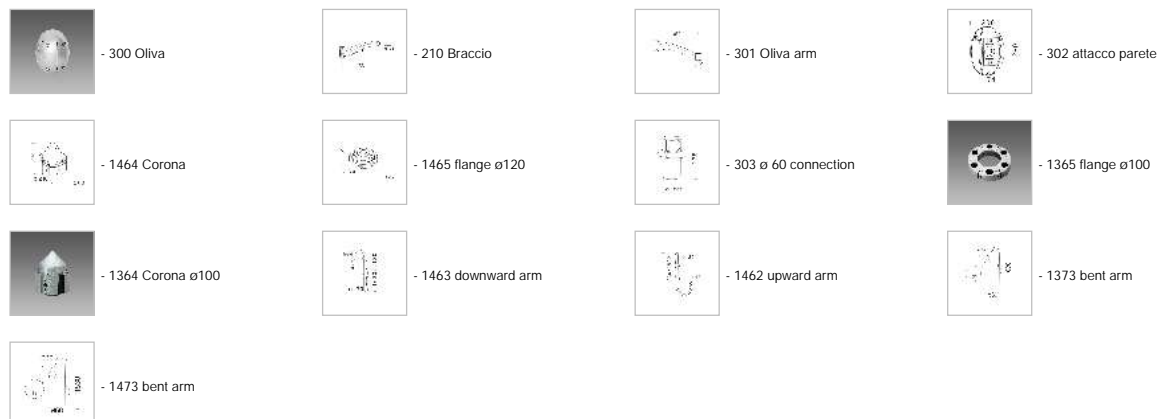

Pall

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1517 Clima LED

Pali



- 1508 fluted pole ϕ 120 with base



- 1509 fluted pole ϕ 120



- 1408 fluted ϕ 100 pole with base



- 1481 tapered steel lighting pole to be buried



- 1480 tapered steel lighting pole with base



- 5 fiberglass pole



- 1409 fluted pole ϕ 100



- 1477 Urban mast with base



- 1478 Urban to be sunk into the ground

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W_{tot} column indicates the total wattage absorbed by the system without exceeding 10% of the indicated