


### 2564 Podio Amber - with lens

Housing/frame: in die-cast aluminium with central articulated joint in die-cast aluminium. Base: in die-cast aluminium. Lens: in PMMA with high efficiency output and very low glare rate. Diffuser: in extra clear tempered glass, 4 mm thick, resistant to thermal shocks and impacts. Graphite coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage for marine environments in compliance with UNI EN ISO 9227 regulation, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating. Grey 9006 coating: the standard powder coating consists of a first metal surface pre-treatment stage for marine environments in compliance with UNI EN ISO 9227 regulation and of single layer of UV-stabilised, corrosion and salt resistant polyester powder coating. Standard Supply: electronic safety device to protect the LED module and the related ballast compliant with EN 61547.. On request: DIMM 1/10V LED: Power factor 0.92. LED: Luminous flux maintenance 80%: 50.000h (L80B20).

#### Download

- DXF 2D  
- 2654.dxf
- 3DS  
- disano\_2564\_podio.3ds
- 3DM  
- disano\_2564\_podio.3dm
- Montaggi  
- podio 12-20.pdf
- BIM  
- 2564 Podio Amber - with lens - 20200611.zip

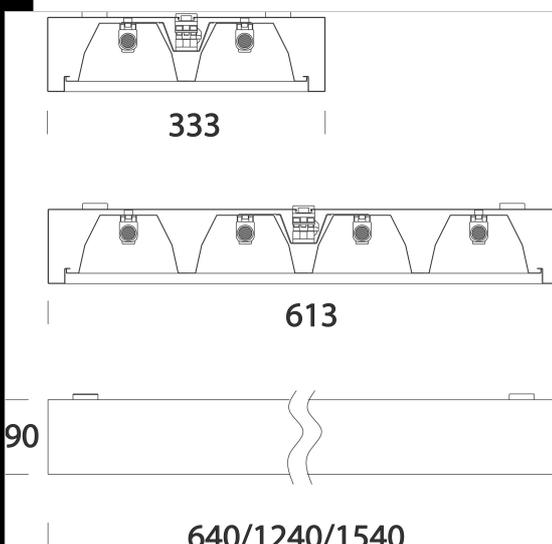

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
422500-73	CLD CELL	1,50	LED COB AMBER-2064lm-2200K - 15° - amber-	28 W	GREY9006
422501-73	CLD CELL	1,50	LED COB AMBER-2064lm-2200K - 15° - amber-	28 W	GRAPHITE
422504-73	CLD CELL	1,50	LED COB AMBER-2153lm-2200K - 30° - amber-	28 W	GREY9006
422505-73	CLD CELL	1,50	LED COB AMBER-2153lm-2200K - 30° - amber-	28 W	GRAPHITE
422502-73	CLD CELL	1,50	LED COB AMBER-3234lm-2200K - 15° - amber-	42 W	GREY9006
422503-73	CLD CELL	1,50	LED COB AMBER-3234lm-2200K - 15° - amber-	42 W	GRAPHITE
422506-73	CLD CELL	1,50	LED COB AMBER-3374lm-2200K - 30° - amber-	42 W	GREY9006
422507-73	CLD CELL	1,50	LED COB AMBER-3374lm-2200K - 30° - amber-	42 W	GRAPHITE

#### Accessori



- 119 peg

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated