




Download

DXF 2D
- 1751_metropolis.dxf
3DS
- 1751_metropolis.3ds
3DM
- 1751_metropolis.3dm
Montaggi
- 1750_3_metrop.pdf

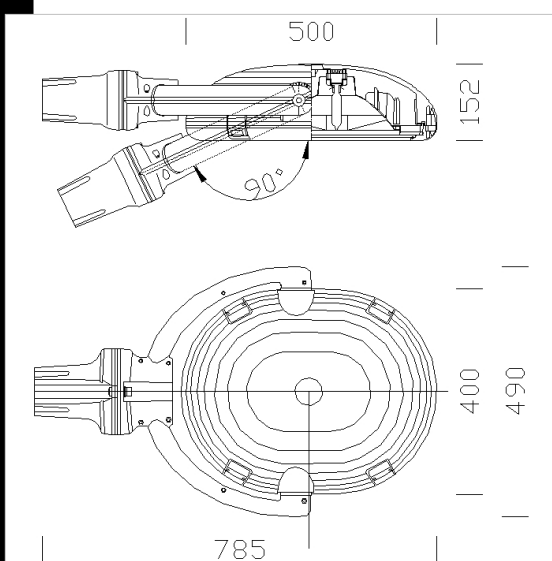

1751 Metropolis narrow beam

Housing: Die-cast aluminium with swiveling bracket and connection for attachment onto Ø 60 poles.

Frame: Die-cast aluminium with hinge opening.

With aluminium latches and safety device against accidental opening.

Reflector: LIGHT POLLUTION PREVENTING OPTIC UNIT. Narrow beam version made of 99.85, 6µ thick anodised and polished turned aluminium.

Diffuser: Tempered glass 5 mm thick, resistant to impact and thermal shock (UNI EN 12150-1: 2001 tests).

Coating: In several stages. epoxy cationic electrocoating, resistant to corrosive and saline environments, UV stabilising priming; lastly a rough finish with frosted silver or graphite paint.

Electric gear: 230V/50Hz power supply: Flexible wire terminated with admiralty brass clamps; silicone insulation; cross-section: 1 sqmm . 2P terminal block (maximum allowed lead cross section 2.5 sqmm.)

Standard supply: Electric gear on a removable tray with quick connectors for line and lampholder connection. Standard supply includes Ø 60 pole unit adapter.

Equipment: During maintenance the cover remains attached hanging from a steel hinge. Environment-friendly gasket. Swivel bracket with protractor scale for housing adjustment. Two knife switches included, one for quick pole installation and one for maintenance.

Regulations: Manufactured in accordance with EN60598 standards. Degree of protection IP65IK08, in accordance with EN60529 standards. Insulation Class II.

On request: Other colours with metallised paint.

Design Studio Dal Lago

Code	Gear	Kg	Watt	Base	Lamps	Colour
422927-00	CNR-L	13,30	CDM-T 150	G12	14000lm-3000K-Ra 1b	GRAPHITE
422923-00	CNR-L	13,30	CDM-T 150	G12	14000lm-3000K-Ra 1b	SANDBLASTED SILVER

Accessories

