

Download

DXF 2D
- 1756.dxf

3DS
- disano_1756_monza.3ds

3DM
- disano_1756_monza.3dm

Montaggi
- 1756_monza_powerled.pdf



1756 Monza - LED

Housing: die cast aluminium.

Diffuser: 5 mm. thick, toughened glass, withstands thermal shocks and impacts (tested according to UNI EN 12150-1: 2001).


Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

Gear: temperature control device inside the lamp with automatic recovery. Standard knife switch.

LED: Latest generation LED technology, Ta-40+40°C life 80%: >100.000h (L80B10). Photobiological safety class: exempt group EN62471.


Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Wind surface: L:800cm².

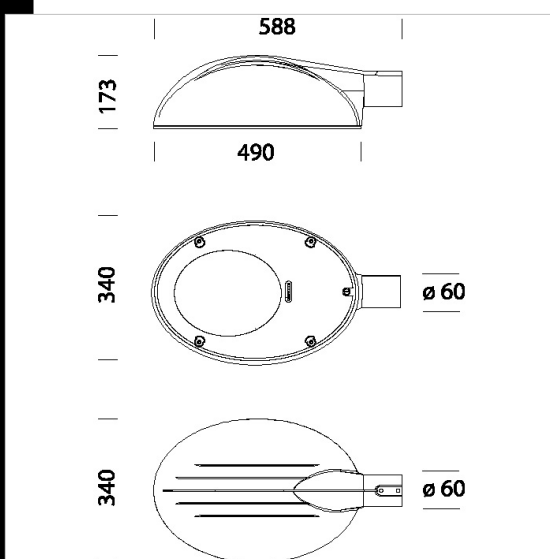

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
423064-00	CLD CELL	7.17	LED-4112lm-350mA-4000K-CRI>70	37 W	GREY9007	6/10kV
423063-00	CLD CELL	6.00	LED-3198lm-350mA-4000K-CRI>70	29 W	GREY9007	6/10kV

Accessories

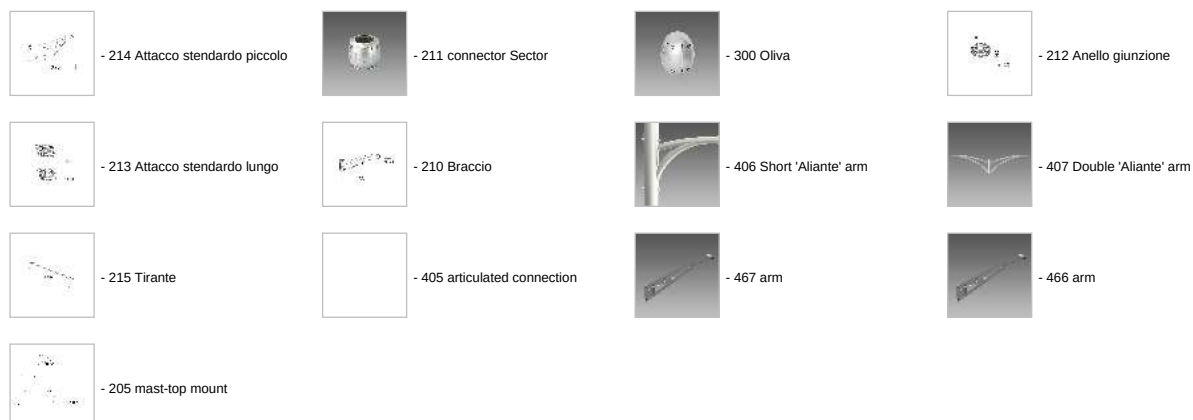

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated