


1782 Discovery LED wide beam

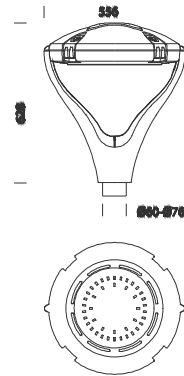

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
423215-00	CLD CELL	12.30	glazed silver+graphite	0x0x628 Ø556	63	LED white 63W-9450lm @ 530mA-4000K-CRI>70

Housing including frame: Die-cast aluminium with locking latches.

Diffuser: 5mm thick tempered glass , resistant to impact and thermal shock (UNI EN 1250-1:2001 tests).

Coating: In several stages. epoxy cationic electrocoating, resistant to corrosive and saline environments, UV stabilising priming; lastly a rough finish with frosted silver or graphite paint.

Equipment: Ø 60 wall or pole mounting unit. Temperature control device inside the lamp with automatic recovery. Safety diode to protect against voltage peaks pursuant to EN61547. Dedicated electronic device to protect the LED module. Standard knife switch. Equipped with an air-circulation valve.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

LED: Latest generation LED technology. Discovery is equipped led 9450lm - 4000K 63W - 530mA. The total return of the equipment is close to 100%. Ta-20+40°C life 60.000h L70B20. Photobiological safety class: exempt group EN62471.