


## 1783 Discovery LED asymmetric

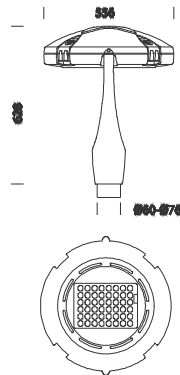

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
423216-00	CLD CELL	13.80	glazed silver+graphite	0x0x628 Ø556	72	LED white 72W-10800lm @ 530mA-4000K-CRI>70

Housing including frame: Die-cast aluminium with locking latches.

Diffuser: 5mm thick tempered glass , resistant to impact and thermal shock (UNI EN 1250-1:2001 tests).

Coating: In several stages. epoxy cationic electrocoating, resistant to corrosive and saline environments, UV stabilising priming; lastly a rough finish with frosted silver or graphite paint.

Equipment: Ø 60 wall or pole mounting unit. Temperature control device inside the lamp with automatic recovery. Standard knife switch. Equipped with an air-circulation valve.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

LED: Latest generation technology. Discovery is equipped led 10800lm - 4000K 72W - 530mA. The total return of the equipment is close to 100%. Ta-20+40°C life 60.000h L70B20. Photobiological safety class: exempt group EN62471.