

1792 Musa - asymmetric low column

Musa was the Goddess who inspired Greek mythology, and this lighting fitting illuminates in the same way, inspiring numerous decorative and non-decorative functions.

Musa is able to blend into the space almost like a physical presence with its sleek design, which is vaguely anthropomorphic; always able to create new atmospheres and highly refined lighting solutions. To the observer's eye Musa looks like a human figure with head bowed, immersed in the green area.

**HOUSING/FRAME:** Made of die-cast aluminium. Extruded aluminum column and base with anchor bolts to recessed

**REFLECTOR:** asymmetric version, polished hammered aluminium 99.9.

**GLASS:** Tempered glass 4 mm, resistant to impact and thermal shock (UNI 12150-1: 2001 tests: 2001).

**COATING:** the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

**LAMPHOLDER:** Ceramic with silver-plated contacts.


**ELECTRIC GEAR:** 230V-50Hz power supply with heat protection. Flexible wire terminated with quick-connect admiralty brass clamps; silicone insulation; cross-section: 1 sqmm . 2P nylon terminal block (maximum allowed lead cross-section: 2.5 sqmm).

During maintenance the frame stays attached on hinges against accidental opening. Environment-friendly gasket.

**REGULATIONS:** Manufactured in accordance with EN 60598-CEI 34-21 standards. Degree of protection in accordance with EN 60529 standards.

Download

- DXF 2D  
- 1792\_1793.dxf
- 3DS  
- disano\_1792\_musa.3ds
- 3DM  
- disano\_1792\_musa.3dm
- Montaggi  
- musa.pdf

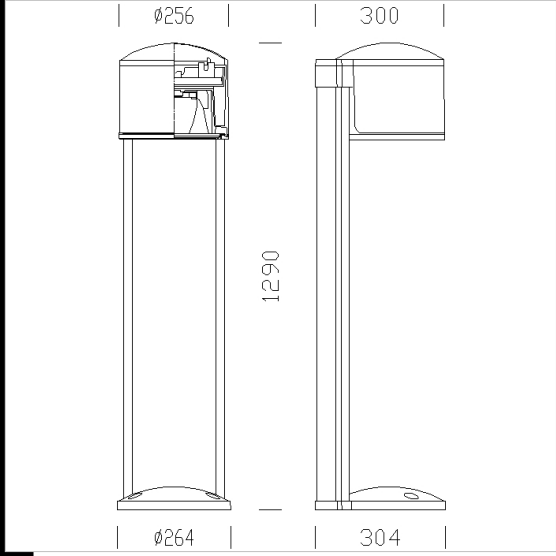

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
423511-00	CNR-L	12.30	JM-TS 70-6500lm-4200K-Ra 1b	91 W	Rx7s	GREY9007/GRAF

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated