



Download

DXF 2D
- 1765.dxf
Montaggi
- lanterna.pdf



1765 Lanterna 1

HOUSING/FRAME: Die-cast aluminium.

COVER: Die-cast aluminium.

DIFFUSER: Vandal resistant, V2 self-extinguishing, UV-stabilised polycarbonate.


REFLECTOR: LIGHT POLLUTION PREVENTING OPTIC UNIT Upper part in 6/8 μ thick anodized, pressed 99.85 aluminium, polished for high luminous efficiency.

COATING: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

LAMPHOLDER: Polycarbonate with phosphorous bronze contacts (FLC). Ceramic with silver-plated contacts

ELECTRIC GEAR: 230V/50HzHz power supply with heat protection. Wire terminated with quick-connect admiralty brass clamps. Fibreglass braid insulation, cross-section: 1.0sqmm. 2P terminal block (maximum allowed lead cross-section of 4 sqmm.)

EQUIPMENT: 6.3A protection fuse. Rubber cable gland, $\varnothing$ 1/2" gas thread For installation on Oliva arm acc. 301, use $\varnothing$ 60 connection acc. 309.

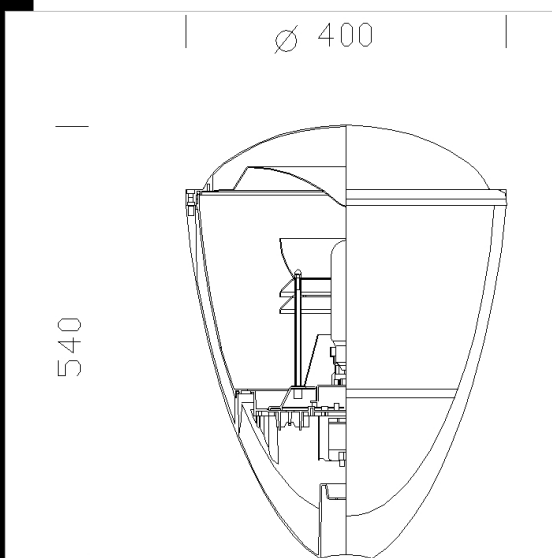

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
424067-00	CNRL-F	6.55	HCI-TT 150-14500lm-3000K-Ra 1a	166 W	E40	GRAPHITE
424068-00	CNRL-F	6.55	SAP-T 100-9000lm-2000K-Ra 4	114 W	E40	GRAPHITE
424063-00	CNRL-F	6.55	SAP-T 100-9000lm-2000K-Ra 4	114 W	E40	GREY9007
424060-00	CNRL-F	5.79	SAP-T 70-6000lm-2000K-Ra 4	84 W	E27	GREY9007
424062-00	CNRL-F	6.55	HCI-TT 150-14500lm-3000K-Ra 1a	166 W	E40	GREY9007
424065-00	CNRL-F	5.79	SAP-T 70-6000lm-2000K-Ra 4	84 W	E27	GRAPHITE

Accessories



- 300 Oliva



- 301 Oliva arm



- 302 attacco parete



- 1464 Corona



- 1465 flange ø120



- 1473 bent arm



- 309 Ø 60 connection

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm$ 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated