


Download

- DXF 2D
- 1766H.dxf
- 3DS
- disano_1766_sicura.3ds
- 3DM
- disano_1766_sicura.3dm
- Montaggi
- 1766 07-20.pdf
- BIM
- 1766 Lanterna LED - 20200604.zip




1766 Lanterna LED

HOUSING/FRAME: Die-cast aluminium.
 COVER: Die-cast aluminium.
 DIFFUSER: Vandal resistant, V2 self-extinguishing, UV-stabilised polycarbonate.
 COATING: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 For installation on Oliva arm acc. 301, use 60 connection acc. 309.
 Ta-20+40°C life 80%: 80.000h (L80B20).Photobiological safety class: exempt group EN62471.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

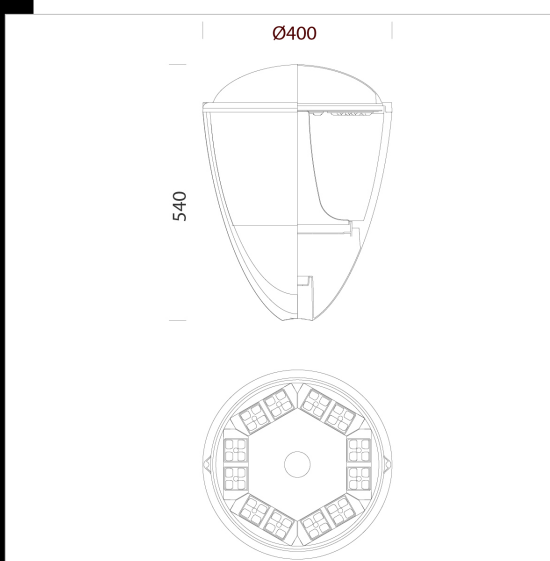


Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
424080-00	CLD CELL	4,50	LED-4264lm-4000K-CRI 70	35 W	GREY9007	6/10kV
424081-00	CLD CELL	4,50	LED-4264lm-4000K-CRI 70	35 W	GRAFITE	6/10kV
424080-39	CLD CELL	5,29	LED-3965lm-3000K-CRI 70	35 W	GREY9007	6/10kV
424081-39	CLD CTL	4,50	LED-3965lm-3000K-CRI 70	36 W	GRAFITE	6/10kV

Accessori

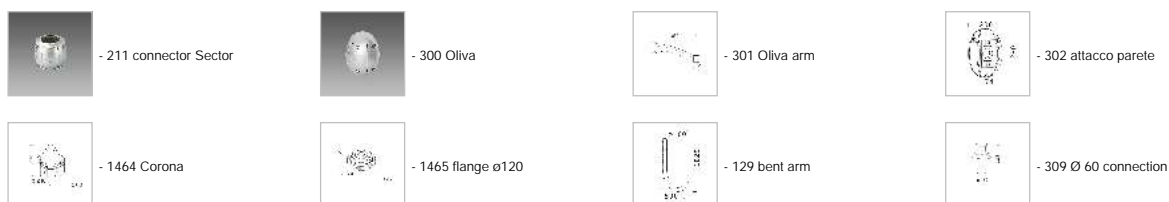

Pali

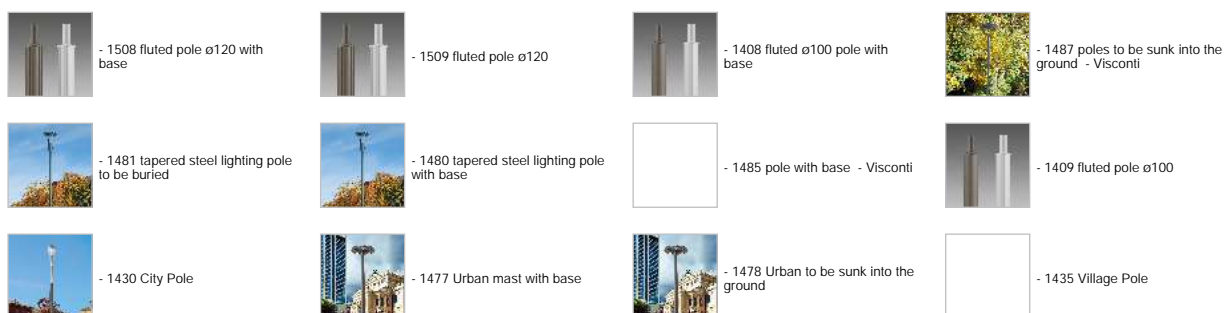

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated