

1766 Lanterna LED

HOUSING/FRAME: Die-cast aluminium.

COVER: Die-cast aluminium.

DIFFUSER: Vandal resistant, V2 self-extinguishing, UV-stabilised polycarbonate.


COATING: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.

For installation on Oliva arm acc. 301, use 60 connection acc. 309.

Ta-20+40°C life 80%: 80.000h (L80B20). Photobiological safety class: exempt group EN62471.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Article available until stocks are exhausted

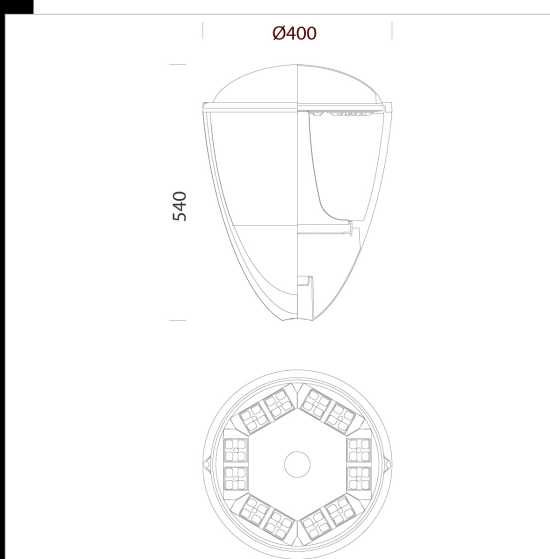

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour	Surge
424081-39	CLD CTL	4,50	LED-3965lm-3000K-CRI 70	35 W	GRAPHITE	6/10kV

Accessori



- 211 connector Sector



- 300 Oliva



- 301 Oliva arm



- 302 attacco parete



- 1464 Corona



- 1465 flange ø120



- 129 bent arm



- 309 Ø 60 connection

Pali



- 1508 fluted pole ø120 with base



- 1509 fluted pole ø120



- 1408 fluted ø100 pole with base



- 1487 poles to be sunk into the ground ø102



- 1481 tapered steel lighting pole to be buried



- 1480 tapered steel lighting pole with base



- 1485 pole with base ø102



- 1409 fluted pole ø100



- 1430 City Pole



- 1477 Urban mast with base



- 1478 Urban to be sunk into the ground



- 1435 Village Pole

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated