


Download
 DXF 2D
 - 1771.dxf
 3DS
 - disano_1771_lanterna_2.3ds
 3DM
 - disano_1771_lanterna_2.3dm
 Montaggi
 - e066_lantgiu_oliva_doppio.dxf
 - e066_lanternadoppia_ananas_giu.dxf
 - e066_lanternadoppia_slendardo_giu.dxf
 - lanterna.pdf

1771 Lanterna 2 - with diffuser



Housing/Frame: Die-cast aluminium.
 Cover: Die-cast aluminium.
 Diffuser: Vandal resistant, V2 self-extinguishing, UV-stabilised clear polycarbonate. With flat tempered glass in versions without cover.
 Coating: In several stages. First stage: black epoxy cationic electrocoating, resistant to corrosive and saline environments. Second stage: UV stabilising priming; lastly, rough finish with frosted silver paint.
 Lampholder: Polycarbonate with phosphorous bronze contacts (FLC). Ceramic with silver-plated contacts
 Electric gear: 230V/50HzHz power supply with heat protection. Silicone wire terminated with admiralty brass quick-connection clamps; fibreglass braid insulation; cross-section: 1 sqmm. 2P terminal block (maximum allowed lead cross-section: 4 sqmm).
 Equipment: 6.3A protection fuse. Rubber cable gland, Ø ½" gas thread
 For installation on Oliva arm acc. 301, use Æ 60 connection acc. 309.

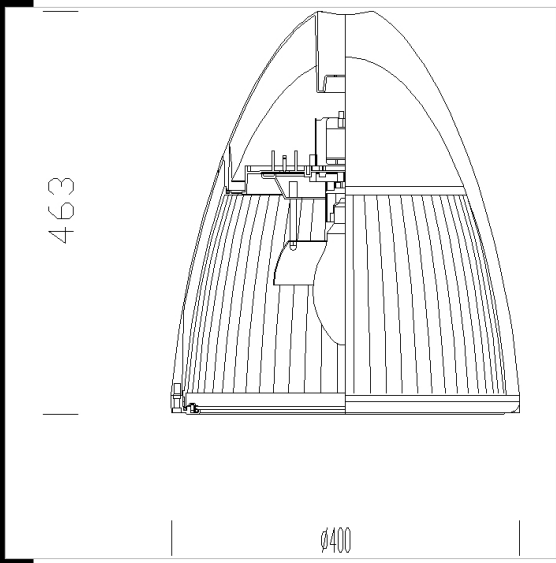

Code	Gear	Kg	Watt	Base	Lamps	Colour
424123-00	CELL-F	4,50	FLC 1x42T/E	Gx24q-4	3200lm-4000K-Ra 1b	SANDBLASTED SILVER
424125-00	CNRL-F	5,80	SAP-E 70	E27	5600lm-2000K-Ra 4	GRAPHITE
424122-00	CNRL-F	6,00	JM-E 100	E27	9000lm-3200K-Ra 2a	SANDBLASTED SILVER
424127-00	CNRL-F	6,00	JM-E 100	E27	9000lm-3200K-Ra 2a	GRAPHITE
424120-00	CNRL-F	5,80	SAP-E 70	E27	5600lm-2000K-Ra 4	SANDBLASTED SILVER

