




### 1580 Volo - asymmetric

**HOUSING:** Supplied with die-cast aluminium frame.  
**REFLECTOR:** Polished hammered anodised aluminium, asymmetric.  
**DIFFUSER:** Flat protection tempered glass, 5 mm thermal shock and impact resistant.  
**COATING:** the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.  
**LAMPHOLDER:** Ceramic with silver-plated contacts  
**ELECTRIC GEAR:** 230V-50Hz power supply with heat protection. Silicone wire terminated with admiralty brass quick-connection clamps; fibreglass braid insulation; cross-section: 1.0 sqmm. 2P terminal block (maximum allowed lead cross-section: 4 sqmm).  
**EQUIPMENT:** Fibreglass nylon cable gland, Ø ½ " gas. Removable fibreglass nylon gear tray. Supplied with knife switch.  
**REGULATIONS:** Manufactured in accordance with EN60598 - CEI 34 - 21 standards. Degree of protection IP65IK8 in accordance with EN60529 standards.


#### Download

- DXF 2D  
- 1580.dxf
- 3DS  
- disano\_1580\_volo.3ds
- 3DM  
- disano\_1580\_volo.3dm
- Montaggi  
- volo.pdf  
- volo\_orient.dxf

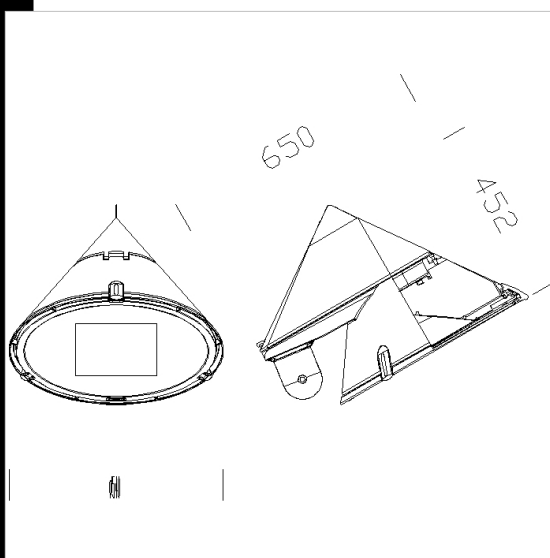

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
424310-00	CNR-L	11.76	JM-TS 150-12000lm-4000K-Ra 1b	176 W	Rx7s	GREY9007/GRAF
424312-00	CNR-L	11.40	SAP-TS 150-15000lm-2000K-Ra 4	176 W	Rx7s	GREY9007/GRAF
424311-00	CNR-L	12.80	JM-TS 250-20000lm-4200k-Ra 1b	277 W	FC2	GREY9007/GRAF
424313-00	CNR-L	11.40	CDM-TS 150-14200lm-4200K-Ra 1a	175 W	Rx7s	GREY9007/GRAF

#### Accessories

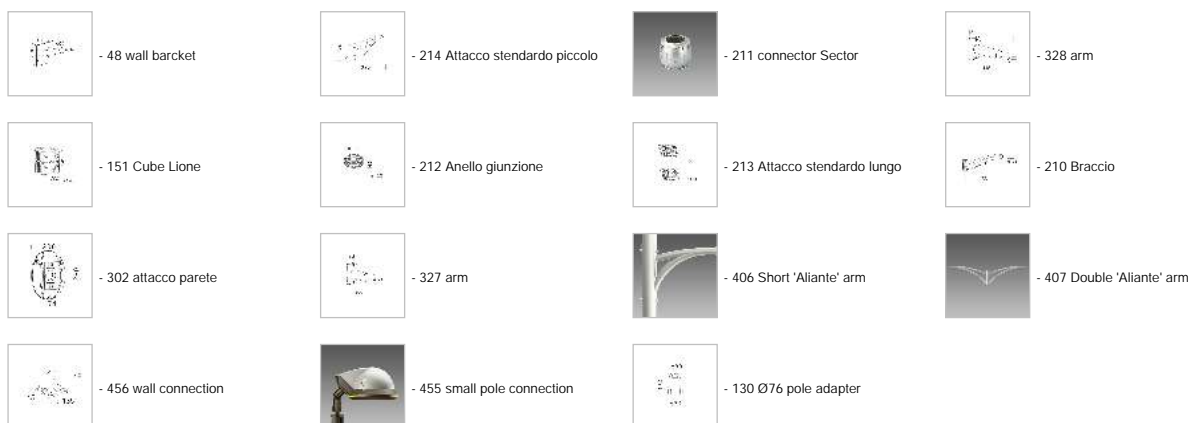

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated