


1572 Volo Bike rails





HOUSING: Supplied with die-cast aluminium frame.
REFLECTOR: Polished hammered anodised aluminium. Version for cycle tracks
DIFFUSER: Flat protection tempered glass, 5 mm thermal shock and impact resistant.
COATING: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
LAMPHOLDER: Ceramic with silver-plated contacts
ELECTRIC GEAR: 230V-50Hz power supply with heat protection. Silicone wire terminated with admiralty brass quick-connection clamps; fibreglass braid insulation; cross-section: 1.0 sqmm. 2P terminal block (maximum allowed lead cross-section: 4 sqmm).
EQUIPMENT: Fibreglass nylon cable gland, Ø ½ " gas. Removable fibreglass nylon gear tray. Supplied with knife switch.
REGULATIONS: Manufactured in accordance with EN60598 - CEI 34 - 21 standards. Degree of protection IP65IK8 in accordance with EN60529 standards.

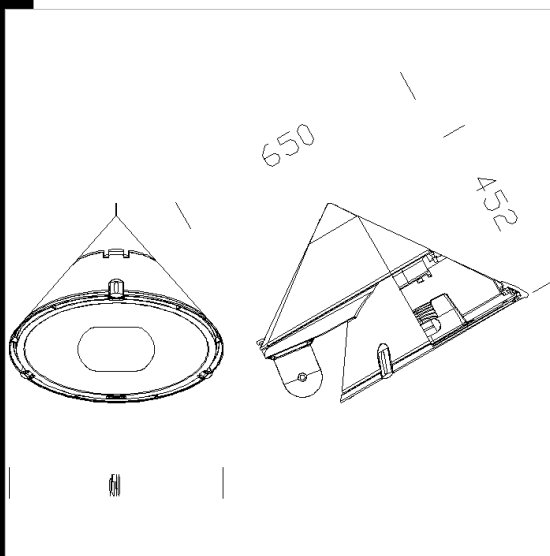

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
424320-00	CNR-L	11.50	SAP-T 70-6000lm-2000K-Ra 4	90 W	E27	GREY9007/GRAF

Accessories

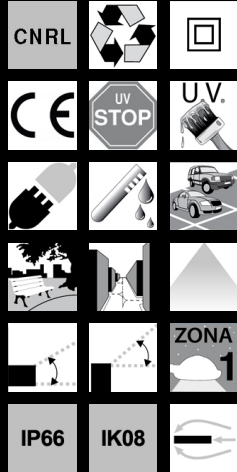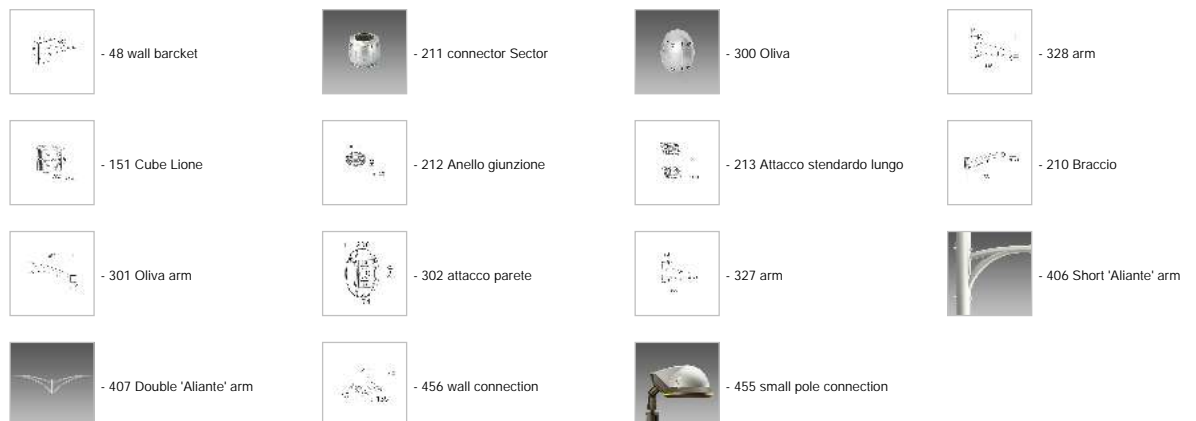

Download

- DXF 2D
- 1572.dxf
- 3DS
- disano_1572_volo.3ds
- 3DM
- disano_1572_volo.3dm
- Montaggi
- volo.pdf
- volo_orient.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated