



1581 Volo - Street optic

**HOUSING:** Supplied with die-cast aluminium frame. **REFLECTOR:** Polished hammered anodised aluminium, symmetric. **DIFFUSER:** Flat protection tempered glass, 5 mm thermal shock and impact resistant. **COATING:** the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating. **LAMPHOLDER:** Ceramic with silver-plated contacts **ELECTRIC GEAR:** 230V-50Hz power supply with heat protection. Silicone wire terminated with admiralty brass quick-connection clamps; fibreglass braid insulation; cross-section: 1.0 sqmm. 2P terminal block (maximum allowed lead cross-section: 4 sqmm). **EQUIPMENT:** Fibreglass nylon cable gland, Ø ½ " gas. Removable fibreglass nylon gear tray. Supplied with knife switch. **REGULATIONS:** Manufactured in accordance with EN60598 - CEI 34 - 21 standards. Degree of protection IP65IK8 in accordance with EN60529 standards.

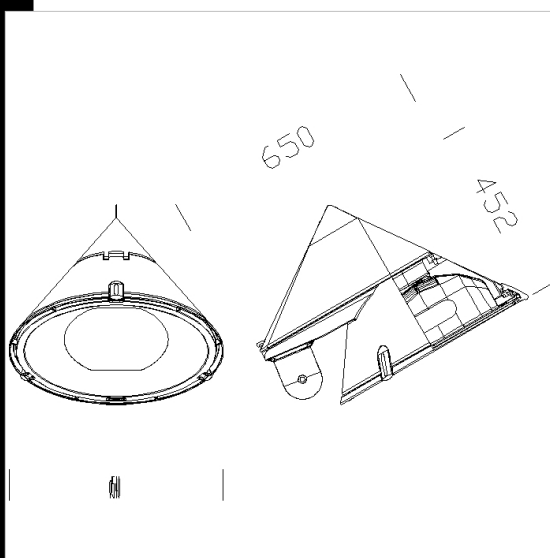

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
424413-00	CNR-L	11.40	CDO-TT 150-13500lm-2800K-Ra 1b	176 W	E40	GREY9007/GRAF
424410-00	CNR-L	11.40	SAP-T 100-9000lm-2000K-Ra 4	114 W	E40	GREY9007/GRAF
424411-00	CNR-L	11.40	SAP-T 150-17200lm-2000K-Ra 4	176 W	E40	GREY9007/GRAF
424412-00	CNR-L	11.50	SAP-T 250-33000lm-2000 K-Ra 4	277 W	E40	GREY9007/GRAF

Accessories

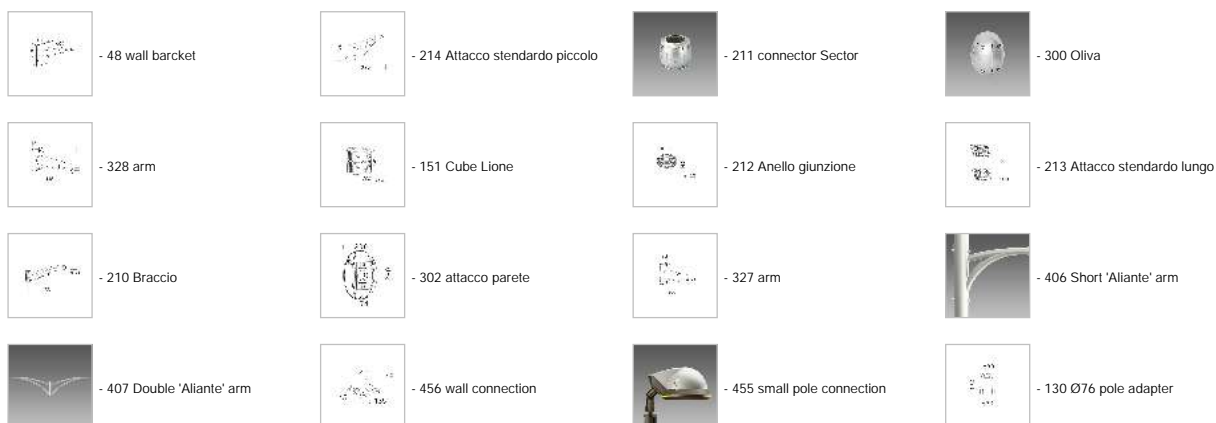

Download

- DXF 2D  
- 1581.dxf
- 3DS  
- disano\_1581\_volo.3ds
- 3DM  
- disano\_1581\_volo.3dm
- Montaggi  
- volo.pdf  
- volo\_orient.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated