




1582 Volo - wide beam

HOUSING: Supplied with die-cast aluminium frame.
REFLECTOR: Polished hammered anodised aluminium.
DIFFUSER: anti-glare pressed prismatic refractor.
COATING: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
LAMPHOLDER: Ceramic with silver-plated contacts
ELECTRIC GEAR: 230V-50Hz power supply with heat protection. Silicone wire terminated with admiralty brass quick-connection clamps; fibreglass braid insulation; cross-section: 1.0 sqmm. 2P terminal block (maximum allowed lead cross-section: 4 sqmm).
EQUIPMENT: Fibreglass nylon cable gland, Ø ½ " gas. Removable fibreglass nylon gear tray. Supplied with knife switch.
REGULATIONS: Manufactured in accordance with EN60598 - CEI 34 - 21 standards. Degree of protection IP65IK8 in accordance with EN60529 standards.

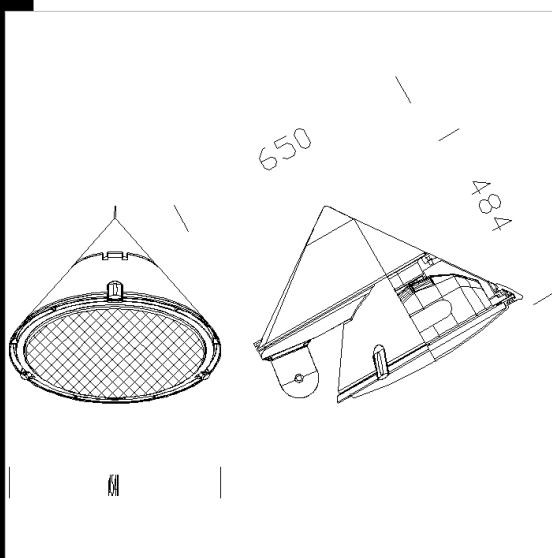

Download

DXF 2D
 - 1582.dxf
 3DS
 - disano_1582_volo.3ds
 3DM
 - disano_1582_volo.3dm
 Montaggi
 - volo.pdf
 - volo_orient.dxf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
424513-0016	CELL	11.04	CDO-TT 150-13500lm-2800K-Ra 1b	176 W	E40	GREY9007/GRAF
424511-00	CNR-L	12.10	SAP-T 150-17200lm-2000K-Ra 4	176 W	E40	GREY9007/GRAF
424513-00	CNR-L	12.10	CDO-TT 150-13500lm-2800K-Ra 1b	176 W	E40	GREY9007/GRAF
424512-0016	CNR-L	11.04	JM-E 100-9000lm-3200K-Ra 2a	114 W	E27	GREY9007/GRAF
424511-0016	CNR-L	11.04	SAP-T 150-17200lm-2000K-Ra 4	176 W	E40	GREY9007/GRAF
424510-00	CELL	12.10	SAP-T 100-9000lm-2000K-Ra 4	114 W	E40	GREY9007/GRAF
424514-00	CNR-L	12.10	JM-T 150-14000lm-4000K-Ra 1b	176 W	E27	GREY9007/GRAF
424510-0016	CNR-L	11.04	SAP-T 100-9000lm-2000K-Ra 4	114 W	E40	GREY9007/GRAF
424512-00	CNR-L	12.10	JM-E 100-9000lm-3200K-Ra 2a	114 W	E27	GREY9007/GRAF
424514-0016	CELL-E	11.04	JM-T 150-14000lm-4000K-Ra 1b	176 W	E27	GREY9007/GRAF

Accessories



- 48 wall bracket



- 211 connector Sector



- 300 Oliva



- 328 arm



- 151 Cube Leone



- 212 Anello giunzione



- 213 Attacco standardo lungo



- 301 Oliva arm



- 302 attacco parete



- 327 arm



- 406 Short 'Aliante' arm



- 407 Double 'Aliante' arm

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1582 Volo - wide beam

Accessories



- 456 wall connection



- 455 small pole connection



- 130 Ø76 pole adapter

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated