

1480 tapered steel lighting pole with base

Tapered steel lighting pole. With hole for insertion of power supply cable, pole-head connection, $\varnothing 60$.

For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased. Size of inspection window 38x132 (h 3000) - 45x186 (h 4000-5000-6000), supplied with protection fuse holder, 2 fuses, 16A, removable terminal block, 4 poles/3 holes = 10sqmm and shunt 2,5sqmm.

Standard insulation class II. When using Insulation Class I fixtures, appropriate grounding connections should be included in the system.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

Download

DXF 2D

- 1481n.dxf

3DS


- disano_1480_tapered_pole_3m.3ds
- disano_1480_tapered_pole_4m.3ds
- disano_1480_tapered_pole_5m.3ds
- disano_1480_tapered_pole_6m.3ds
- disano_1480_tapered_pole_7m.3ds

3DM

- disano_1480_tapered_pole_3m.3dm
- disano_1480_tapered_pole_4m.3dm
- disano_1480_tapered_pole_5m.3dm
- disano_1480_tapered_pole_6m.3dm
- disano_1480_tapered_pole_7m.3dm

Montaggi

- 1480-1481 09-18.pdf

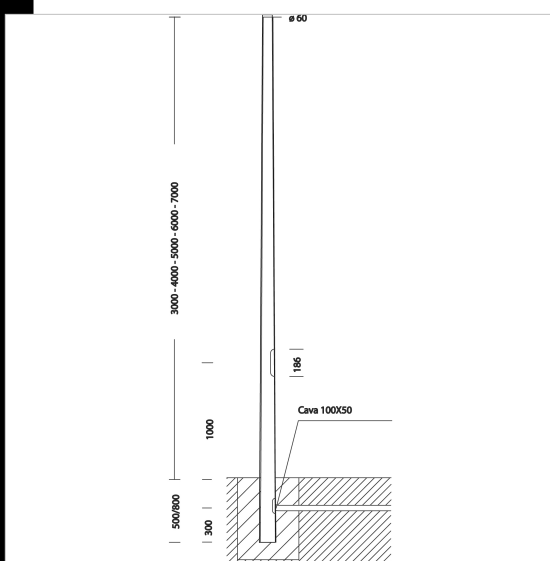

Code	Kg	Colour	Dimension	Aboveground	Underground
425050-00	22.00	GREY9007	0x0x3000 $\varnothing 0$		
425051-00	26.00	GREY9007	0x0x4000 $\varnothing 0$		
425052-00	39.00	GREY9007	0x0x5000 $\varnothing 0$		
425053-00	44.00	GREY9007	0x0x6000 $\varnothing 0$		
425058-00	70.00	GREY9007	0x0x7000 $\varnothing 0$		
425067-00	85.00	GREY9007	0x0x8000 $\varnothing 0$		
425054-00	21.00	GRAPHITE	0x0x3000 $\varnothing 0$		
425055-00	24.00	GRAPHITE	0x0x4000 $\varnothing 0$		
425056-00	39.00	GRAPHITE	0x0x5000 $\varnothing 0$		
425057-00	44.00	GRAPHITE	0x0x6000 $\varnothing 0$		
425059-00	70.00	GRAPHITE	0x0x7000 $\varnothing 0$		
425052-00000583	0.00		0x0x5000 $\varnothing 0$	5000	arg.
425050-00000583	0.00		0x0x3000 $\varnothing 0$	3000	arg.
425051-00000583	0.00		0x0x4000 $\varnothing 0$	4000	arg.
425068-00	85.00	GRAPHITE	0x0x8000 $\varnothing 0$		
425056-00000583	0.00		0x0x5000 $\varnothing 0$	5000	graf.
425055-00000583	0.00		0x0x4000 $\varnothing 0$	4000	graf.
425058-00000583	0.00		0x0x7000 $\varnothing 0$	7000	arg.
425059-00000583	0.00		0x0x7000 $\varnothing 0$	7000	graf.
425054-00000583	0.00		0x0x3000 $\varnothing 0$	3000	graf.

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1480 tapered steel lighting pole with base

Code	Kg	Colour	Dimension	Aboveground	Underground
425057-00000583	0.00		0x0x6000 ø0	6000	graf.
425043-00000583	0.00		0x0x6000 ø0	6000	arg.

Accessories

	- 214 Attacco standardo piccolo		- 300 Oliva		- 328 arm		- 210 Braccio
	- 301 Oliva arm		- 327 arm		- 305 end cap		- 512 Arm
	- 295 log-bolts - France only						

Products

	- 1203 Kenia		- 1201 Giordania		- 1513 Torcia LED COB		- 1766 Lanterna LED
	- 3197 Montecarlo LED with		- 3194 Sforza LED with bracket - light scattering with elliptical		- 1573 Volo LED wide beam		- 1593 Volo LED - bike trails
	- 3221 Sforza LED asymmetric		- 1517 Clima LED		- 1518 Clima LED against light		- 3196 Sforza LED with bracket -
	- 3178 Montecarlo LED with bracket - light scattering with		- 1335 Globo LED against light		- 3270 Stelvio 1 - Plus - LED		- 3273 Stelvio 1 - Plus S - LED
	- 1221 Bastia		- 3275 Mini Stelvio - street type		- 3276 Mini Stelvio - asymmetric		- 1707 Torcia LED
	- 3280 Rolle - T1		- 3277 Mini Stelvio FX T2 - street		- 3278 Mini Stelvio FX T3 - light		- 3269 Mini Stelvio FX T5 - light
	- 3281 Rolle - T2		- 3282 Rolle - T3		- 3283 Rolle - T4		- 3284 Rolle - T5
	- 3334 Disco 5 - LED - central connection		- 1570 Clima - LED		- 3342 Loto 3 - asymmetric		- 3340 Loto 1 - Clear wide beam
	- 1205 Polar - LED		- 3343 Loto 4 - cycle lanes		- 3274 Stelvio 2 - Plus - LED asymmetric		- 3355 Garda 5 - roto-symmetrical
	- 3350 Garda 1 - roto-symmetrical		- 3351 Garda 2 - asymmetric		- 3353 Garda 4 - cycle lanes + street type		- 3352 Garda 3 - cycle lanes
	- 3290 Sella 1 - ST		- 3340 Loto 2 - matt wide beam		- 3291 Sella 1 - STWB		- 3383 Como 1 - roto-symmetrical
	- 3384 Como 2 - asymmetric		- 3385 Como 3 - cycle lanes				

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated