


## 1480 tapered steel lighting pole with base

Tapered steel lighting pole. With hole for insertion of power supply cable, pole-head connection,  $\varnothing 60$ .

For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased. Size of inspection window 38x132 (h 3000) - 45x186 (h 4000-5000-6000), supplied with protection fuse holder, 2 fuses, 16A, removable terminal block, 4 poles/3 holes = 10sqmm and shunt 2,5sqmm.

Standard insulation class II. When using Insulation Class I fixtures, appropriate grounding connections should be included in the system.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

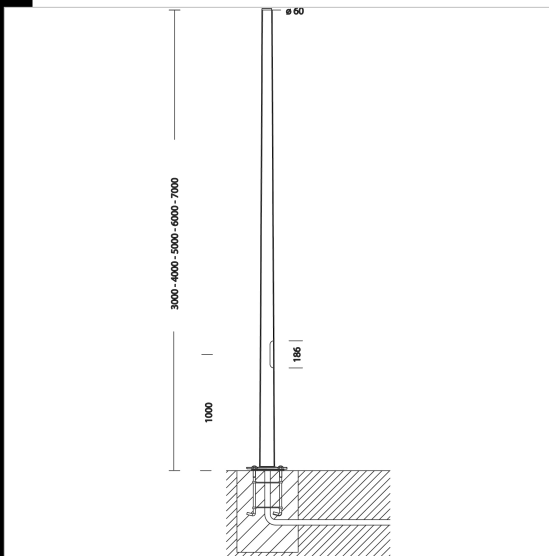

### Download

DXF 2D  
- 1480b.dxf

### 3DS

- disano\_1480\_tapered\_pole\_3m.3ds  
- disano\_1480\_tapered\_pole\_4m.3ds  
- disano\_1480\_tapered\_pole\_5m.3ds  
- disano\_1480\_tapered\_pole\_6m.3ds  
- disano\_1480\_tapered\_pole\_7m.3ds

### 3DM

- disano\_1480\_tapered\_pole\_3m.3dm  
- disano\_1480\_tapered\_pole\_4m.3dm  
- disano\_1480\_tapered\_pole\_5m.3dm  
- disano\_1480\_tapered\_pole\_6m.3dm  
- disano\_1480\_tapered\_pole\_7m.3dm

### Montaggi

- 1480-1481 09-18.pdf

Code	Kg	Colour	Dimension	Aboveground	Underground
425050-00	22.00	GREY9007	0x0x3000 $\varnothing 0$		
425051-00	26.00	GREY9007	0x0x4000 $\varnothing 0$		
425052-00	39.00	GREY9007	0x0x5000 $\varnothing 0$		
425053-00	44.00	GREY9007	0x0x6000 $\varnothing 0$		
425058-00	70.00	GREY9007	0x0x7000 $\varnothing 0$		
425067-00	85.00	GREY9007	0x0x8000 $\varnothing 0$		
425054-00	21.00	GRAPHITE	0x0x3000 $\varnothing 0$		
425055-00	24.00	GRAPHITE	0x0x4000 $\varnothing 0$		
425056-00	39.00	GRAPHITE	0x0x5000 $\varnothing 0$		
425057-00	52.00	GRAPHITE	0x0x6000 $\varnothing 0$		
425068-00	85.00	GRAPHITE	0x0x8000 $\varnothing 0$		
425059-00	70.00	GRAPHITE	0x0x7000 $\varnothing 0$		
425050-00000583	0.00	GREY9007	0x0x3000 $\varnothing 0$		
425051-00000583	0.00	GREY9007	0x0x4000 $\varnothing 0$		
425052-00000583	0.00	GREY9007	0x0x5000 $\varnothing 0$		
425053-00000583	44.00	GREY9007	0x0x6000 $\varnothing 0$		
425058-00000583	0.00	GREY9007	0x0x7000 $\varnothing 0$		
425067-00000583	85.00	GREY9007	0x0x8000 $\varnothing 0$		
425054-00000583	0.00	GRAPHITE	0x0x3000 $\varnothing 0$		
425055-00000583	0.00	GRAPHITE	0x0x4000 $\varnothing 0$		

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1480 tapered steel lighting pole with base

Code	Kg	Colour	Dimension	Aboveground	Underground
425056-00000583	0.00	GRAPHITE	0x0x5000 ø0		
425057-00000583	0.00	GRAPHITE	0x0x6000 ø0		
425059-00000583	0.00	GRAPHITE	0x0x7000 ø0		
425068-00000583	0.00	GRAPHITE	0x0x8000 ø0		
425086-00	25.00	ANTHRACITE	0x0x3000 ø0		
425087-00	30.80	ANTHRACITE	0x0x4000 ø0		
425088-00	40.00	ANTHRACITE	0x0x5000 ø0		
425089-00	44.00	ANTHRACITE	0x0x6000 ø0		
425072-00	70.00	ANTHRACITE	0x0x7000 ø0		
425073-00	85.00	ANTHRACITE	0x0x8000 ø0		

Accessories





- 299



- 295 log-bolts - France only

Products

 - 1203 Kenia	 - 1201 Giordania	 - 1513 Torcia LED COB	 - 1766 Lanterna LED
 - 3197 Montecarlo LED with	 - 3194 Sforza LED with bracket - light scattering with elliptical	 - 1573 Volo LED wide beam	 - 1593 Volo LED - bike trails
 - 3221 Sforza LED asymmetric	 - 1517 Clima LED	 - 1518 Clima LED against light	 - 3196 Sforza LED with bracket -
 - 3178 Montecarlo LED with bracket - light scattering with	 - 1335 Globo LED against light	 - 3270 Stelvio 1 - Plus - LED	 - 3273 Stelvio 1 - Plus S - LED
 - 1221 Bastia	 - 3275 Mini Stelvio - street type	 - 3276 Mini Stelvio - asymmetric	 - 1707 Torcia LED
 - 3280 Rolle - T1	 - 3277 Mini Stelvio FX T2 - street	 - 3278 Mini Stelvio FX T3 - light	 - 3269 Mini Stelvio FX T5 - light
 - 3281 Rolle - T2	 - 3282 Rolle - T3	 - 3283 Rolle - T4	 - 3284 Rolle - T5
 - 3334 Disco 5 - central connection	 - 1570 Clima - LED	 - 3342 Loto 3 - asymmetric	 - 3340 Loto 1 - clear wide beam
 - 1205 Polar	 - 3343 Loto 4 - cycle lanes	 - 3274 Stelvio 2 - Plus - LED asymmetric	 - 3355 Garda 5 - rotosymmetrical
 - 3350 Garda 1 - rotosymmetrical	 - 3351 Garda 2 - asymmetric	 - 3353 Garda 4 - cycle lanes + street type	 - 3352 Garda 3 - cycle lanes
 - 3340 Loto 2 - matt wide beam	 - 3383 Como 1 - rotosymmetrical	 - 3384 Como 2 - asymmetric	 - 3385 Como 3 - cycle lanes

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated