


**Download**

DXF 2D  
- 1492.dxf

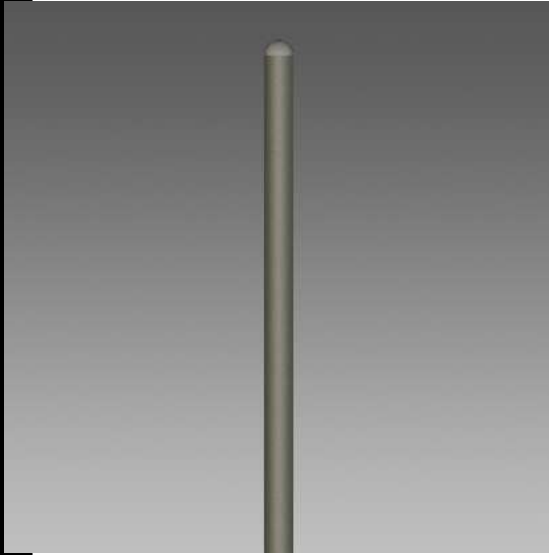


**1492 poles to be sunk into the ground**

Steel pole  $\varnothing$  102, silver-coloured. With die-cast aluminium inspection window (191x55mm), complete with 2 protection fuse holders, 2 fuses, 16A, removable 4-pole terminal block. With hole for insertion of power supply cable. Power adaptor  $\varnothing$ 60 mm. For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased.

Use is recommended with accessories 465/467 and articles Agadir, Monza and Metropolis.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. standard. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed.

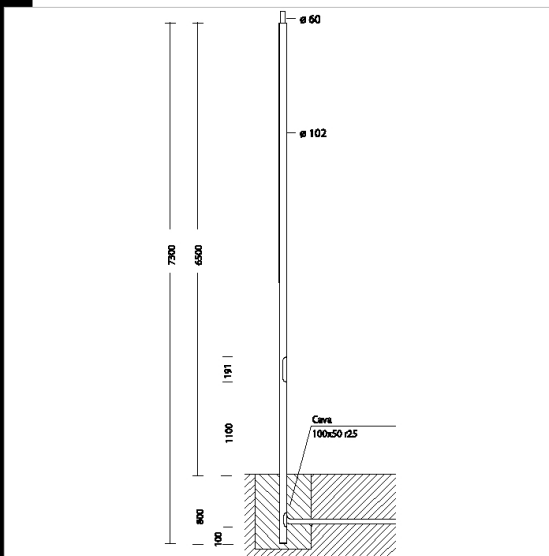

| Code      | Kg   | Colour             | Dimension      | Aboveground | Underground |
|-----------|------|--------------------|----------------|-------------|-------------|
| 425061-00 | 0.00 | SANDBLASTED SILVER | 0x0x7300 Å_102 | 6500        | 800         |

**Products**

