

Download

DXF 2D
- 1487.dxf

3DS
- disano_1487_pole_7m.3ds
- disano_1487_pole_5m.3ds

3DM
- disano_1487_pole_7m.3dm
- disano_1487_pole_5m.3dm


Montaggi
- 1485-1487 08-19.pdf



1487 poles to be sunk into the ground - Visconti


Steel pole $\varnothing$ 102, silver-coloured. With die-cast aluminium inspection window (191x55mm), complete with 2 protection fuse holders, 2 fuses, 16A, removable 4-pole terminal block. With hole for insertion of power supply cable. Power adaptor $\varnothing$ 60 mm. For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

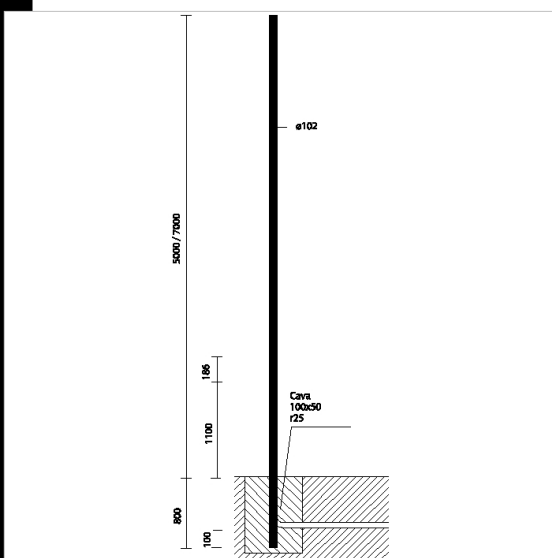

Code	Kg	Colour	Dimension	Aboveground	Underground
425064-00	42.00	GRAPHITE	5800x0x0 $\varnothing$ 102	5000	800
425065-00	60.00	GRAPHITE	7800x0x0 $\varnothing$ 102	7000	800

Accessories

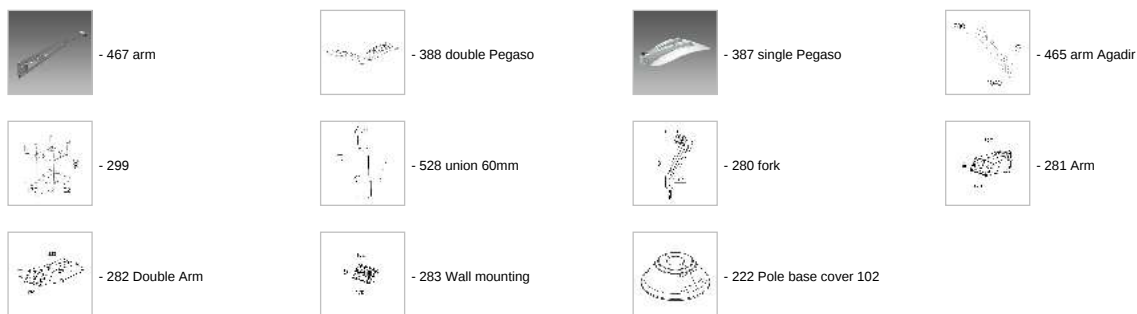

Products



The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm$ 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1487 poles to be sunk into the ground - Visconti

Products



- 3303 Visconti



- 3321 Pordoi 5 - LED - Wide beam



- 3317 Pordoi



- 3306 Visconti 7 LED - street type



- 1293 Cilindro 4



- 3311 Visconti 12 - STWB

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated