

Download


- DXF 2D
- 1485p.dxf
- 3DS
- disano_1485_pole_5m.3ds
- disano_1485_pole_7m.3ds
- 3DM
- disano_1485_pole_5m.3dm
- disano_1485_pole_7m.3dm



1485 pole with base - Pegaso

Steel pole \varnothing 102, silver-coloured. With die-cast aluminium inspection window (191x55mm), complete with 2 protection fuse holders, 2 fuses, 16A, removable 4-pole terminal block. With hole for insertion of power supply cable. Power adaptor \varnothing 60 mm. For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

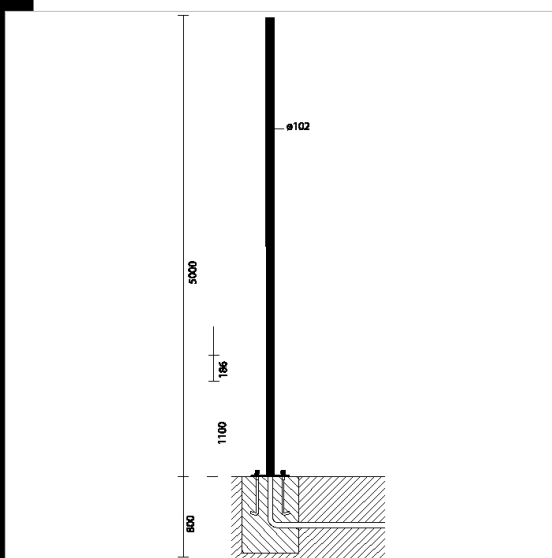

Code	Kg	Colour	Dimension	Aboveground	Underground
425070-00	63,00	GREY9007	5000x0x0 \varnothing 102	5000	

Accessori



- 388 double Pegaso



- 387 single Pegaso



- 299



- 296 log-bolts - France only



- 222 Pole base cover 102

The reported luminous flux is the flux emitted by the light source with a tolerance of \pm 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated