




Download

DXF 2D
- 1494.dxf

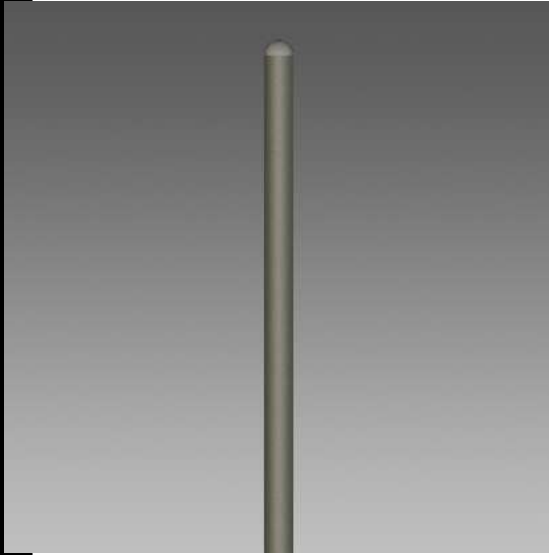


1494 pole with base

Steel pole \varnothing 102, silver-coloured. With die-cast aluminium inspection window (191x55mm), complete with 2 protection fuse holders, 2 fuses, 16A, removable 4-pole terminal block. With hole for insertion of power supply cable. Power adaptor \varnothing 60 mm. For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased.

Use is recommended with accessories 465/467 and articles Agadir, Monza and Metropolis.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed.

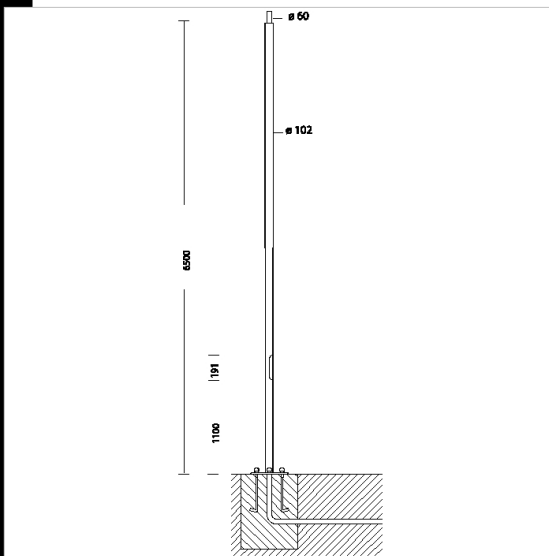

Code	Kg	Colour	Dimension	Aboveground	Underground
425071-00	0.00	SANDBLASTE D SILVER	0x0x6500 \varnothing 0	6500	

Accessories



- 296



- 296 log-bolts - France only

Products



- 1667 Brera



- 1669 Mini Brera



- 3275 Mini Stelvio - street type



- 3280 Rolle - T1



- 3277 Mini Stelvio FX T2 - street type



- 3278 Mini Stelvio FX T3 - light scattering street type



- 3269 Mini Stelvio FX T5 - light scattering



- 3281 Rolle - T2



- 3282 Rolle - T3



- 3283 Rolle - T4



- 3284 Rolle - T5



- 3355 Garda 5 - rotosymmetrical



- 3350 Garda 1 - rotosymmetrical



- 3351 Garda 2 - asymmetric



- 3353 Garda 4 - cycle lanes + street type



- 3352 Garda 3 - cycle lanes



- 3290 Sella 1 - ST



- 3291 Sella 1 - STWB



- 3383 Como 1 - rotosymmetrical



- 3384 Como 2 - asymmetric

The reported luminous flux is the flux emitted by the light source with a tolerance of \pm 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1494 pole with base

Products



- 3385 Como 3 - cycle lanes

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated