

### 1490 Virgola Mast

Tapered steel lighting pole. With hole for insertion of power supply cable, pole-head connection,  $\varnothing 60$ .


For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased.

When using insulation Class I fixtures, appropriate grounding connections should be included in the system.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

**Download**

- DXF 2D  
- 1490.dxf
- Montaggi  
- 1490 10-19.pdf

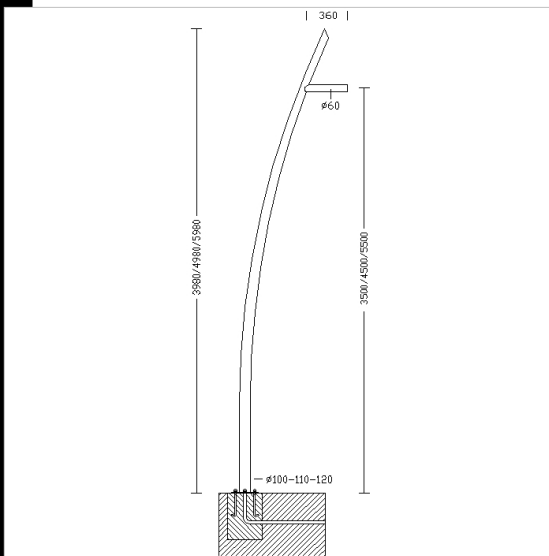

Code	Kg	Colour	Dimension	Aboveground	Underground
425080-00	38,00	GREY	3500x0x0 $\varnothing 0$	3500	
425081-00	41,00	GREY	4500x0x0 $\varnothing 0$	4500	
425082-00	60,00	GREY	5500x0x0 $\varnothing 0$	5500	

**Accessori**



- 299



- 295 log-bolts - France only

**Prodotti**



- 3223 Sforza LED - asymmetric



- 3227 Sforza LED



- 3277 Mini Stelvio FX T2 - street type



- 3269 Mini Stelvio FX T5 - light scattering



- 3375 Mini Stelvio - high performance - street type



- 3376 Mini Stelvio - high performance - large areas

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated