


1481 tapered steel lighting pole to be buried

Tapered steel lighting pole. With hole for insertion of power supply cable, pole-head connection, $\varnothing 60$.
For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased. Size of inspection window 38x132 (h 3000) - 45x186 (h 4000-5000-6000), supplied with protection fuse holder, 2 fuses, 16A, removable terminal block, 4 poles/3 holes = 10sqmm and shunt 2,5sqmm.
Standard insulation class II. When using Insulation Class I fixtures, appropriate grounding connections should be included in the system.
NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed





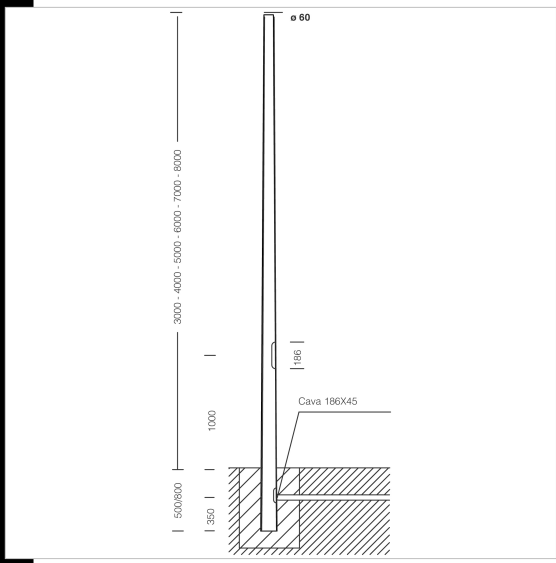




























Download
DXF 2D
- 1481c.dxf
3DS
- disano_1481_tapered_pole_3m.3ds
- disano_1481_tapered_pole_4m.3ds
- disano_1481_tapered_pole_5m.3ds
- disano_1481_tapered_pole_6m.3ds
- disano_1481_tapered_pole_7m.3ds
3DM
- disano_1481_tapered_pole_3m.3dm
- disano_1481_tapered_pole_4m.3dm
- disano_1481_tapered_pole_5m.3dm
- disano_1481_tapered_pole_6m.3dm
- disano_1481_tapered_pole_7m.3dm
Montaggi
- 1480-1481 09-18.pdf

Code	Kg	Colour	Dimension	Aboveground	Underground
425150-00	20.00	GREY9007	0x0x3500 $\varnothing 0$	3000	500
425151-00	28.00	GREY9007	0x0x4500 $\varnothing 0$	4000	500
425152-00	36.00	GREY9007	0x0x5500 $\varnothing 0$	5000	500
425153-00	48.00	GREY9007	0x0x6800 $\varnothing 0$	6000	800
425158-00	59.00	GREY9007	0x0x7800 $\varnothing 0$	7000	800
425167-00	98.20	GREY9007	0x0x8800 $\varnothing 0$	8000	800
425154-00	20.00	GRAPHITE	0x0x3500 $\varnothing 0$	3000	500
425155-00	28.00	GRAPHITE	0x0x4500 $\varnothing 0$	4000	500
425156-00	36.00	GRAPHITE	0x0x5500 $\varnothing 0$	5000	500
425157-00	48.00	GRAPHITE	0x0x6800 $\varnothing 0$	6000	800
425159-00	59.00	GRAPHITE	0x0x7800 $\varnothing 0$	7000	800
425168-00	98.20	GRAPHITE	0x0x8800 $\varnothing 0$	8000	800
425160-00	18.00	ANTHRACITE	0x0x3500 $\varnothing 0$	3000	500
425161-00	25.90	ANTHRACITE	0x0x4500 $\varnothing 0$	4000	500
425162-00	33.50	ANTHRACITE	0x0x5500 $\varnothing 0$	5000	500
425163-00	51.00	ANTHRACITE	0x0x6800 $\varnothing 0$	6000	800
425164-00	59.00	ANTHRACITE	0x0x7800 $\varnothing 0$	7000	800
425165-00	98.20	ANTHRACITE	0x0x8800 $\varnothing 0$	8000	800

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Products

Products

	- 1203 Kenia		- 1201 Giordania		- 1513 Torcia LED COB		- 1766 Lanterna LED
	- 3197 Montecarlo LED with bracket - cycle lanes		- 3194 Sforza LED with bracket - light scattering with elliptical lenses		- 1573 Volo LED wide beam		- 1593 Volo LED - bike trails
	- 3221 Sforza LED asymmetric		- 1517 Clima LED		- 1518 Clima LED against light pollution		- 3196 Sforza LED with bracket - cycle lanes
	- 3178 Montecarlo LED with bracket - light scattering with elliptical lenses		- 1335 Globo LED against light pollution		- 3270 Stelvio 1 - Plus - LED		- 3273 Stelvio 1 - Plus S - LED
	- 1221 Bastia		- 3275 Mini Stelvio - street type		- 3276 Mini Stelvio - asymmetric		- 1707 Torcia LED
	- 3280 Rolle - T1		- 3277 Mini Stelvio FX T2 - street type		- 3278 Mini Stelvio FX T3 - light scattering street type		- 3269 Mini Stelvio FX T5 - light scattering
	- 3281 Rolle - T2		- 3282 Rolle - T3		- 3283 Rolle - T4		- 3284 Rolle - T5
	- 3334 Disco 5 - central		- 1570 Clima - LED		- 3342 Loto 3 - asymmetric		- 3340 Loto 1 - clear wide beam
	- 1205 Polar - LED		- 3343 Loto 4 - cycle lanes		- 3274 Stelvio 2 - Plus - LED		- 3355 Garda 5 -
	- 3350 Garda 1 -		- 3351 Garda 2 - asymmetric		- 3353 Garda 4 - cycle lanes +		- 3352 Garda 3 - cycle lanes
	- 3340 Loto 2 - matt wide beam		- 3383 Como 1 - rotsymmetrical		- 3384 Como 2 - asymmetric		- 3385 Como 3 - cycle lanes

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated