


## 1498 Liberty Mast

Liberty Pole, complete with one or two brackets. Internal steel pole with die-cast aluminium coating. Die-cast aluminium inspection window. Complete with 2 protection fuse holders, 2 fuses, 16A, removable 4-pole terminal block, 16sqmm cross section.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

### Download

- DXF 2D  
- liberty.dxf
- 3DS  
- disano\_1498\_liberty\_1\_arm.3ds  
- disano\_1498\_liberty\_2\_arms.3ds
- 3DM  
- disano\_1498\_liberty\_2\_arms.3dm  
- disano\_1498\_liberty\_1\_arm.3dm
- Montaggi  
- 1498 12-08.pdf

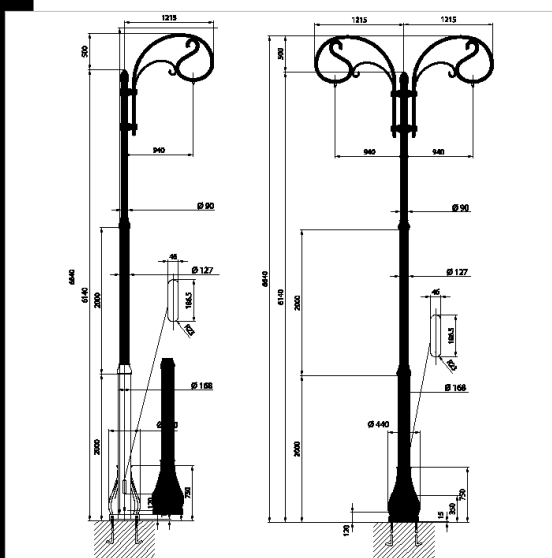

Code	Kg	Colour	Dimension	Aboveground	Underground
425200-00	0,00	GRAPHITE	0x0x6140 ø440	6140	
425202-00	0,00	GRAPHITE	0x0x6140 ø440	6140	

### Accessori



- 297 Log-Bolts



- 296 log-bolts - France only

### Prodotti



- 3203 Lucerna Q3 with diffuser



- 3210 Lucerna R1



- 3200 Lucerna Q1



- 3142 Campana LED



- 3206 Lucerna Q6 LED



- 3216 Lucerna R6 LED



- 3141 Campana LED

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated