


1410 Pole with base

Pole in hot galvanized steel, thermosetting polystyrene powder coating. Base, inspection window and decorations in pressed die-cast aluminium and painted. Supplied with inspection window, 2 protection fuse holders, 2 fuses (16A), removable terminal block. Stainless steel screws.
NOTE: Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

- Download**
DXF 2D
- 1410.dxf
3DS
- disano_1410_lucerna_simple.3ds
- disano_1410_lucerna.3ds
3DM
- disano_1410_lucerna.3dm
- disano_1410_lucerna_simple.3dm
Montaggi
- 1410base.dxf
- 1410-1411-1420-1421 03-11.pdf

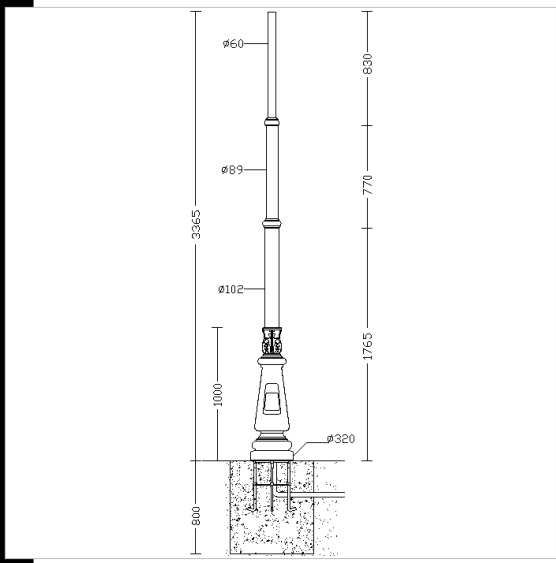

Code	Kg	Colour	Dimension	Aboveground	Underground
425220-00000583	0.00	ANTHRACITE	3365x0x0 ø0	3365	0
425220-00	0.00	ANTHRACITE	3365x0x0 ø0	3365	0

Accessories

-  - 299
-  - 295 log-bolts - France only

Products

-  - 3203 Lucerna Q3 with diffuser
-  - 3210 Lucerna R1
-  - 3213 Lucerna R3 with diffuser
-  - 3212 Lucerna R LED
-  - 3200 Lucerna Q1
-  - 3209 Lucerna O8 LED asymmetric
-  - 3214 Lucerna LED
-  - 3202 Lucerna O2 LED COB

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated