



### 1441 poles to be sunk into the ground


Steel pole. With die-cast aluminium inspection window complete with 2 protection fuse holders, 2 fuses, 10A, removable 4-pole terminal block. With hole for insertion of power supply cable.

For use with ACC. 513/532 or pole top diam 60

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

#### Download

- DXF 2D  
- 1441s.dxf
- 3DS  
- disano\_1441\_aura.3ds
- 3DM  
- disano\_1441\_aura.3dm
- Montaggi  
- 1440-1441-1477-1478 10-13.pdf

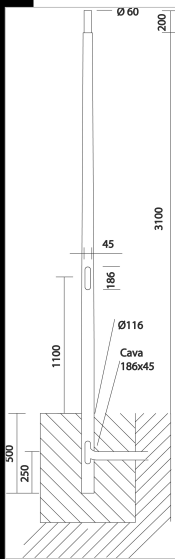

Code	Kg	Colour	Dimension	Aboveground	Underground
425266-00	50,00	GREY9007	0x0x3600 Ø0	3100	500
425267-00	28,00	GRAPHITE	0x0x3600 Ø0	3100	500

#### Accessori



- 513 bent arm for Aura



- 532 Double arm

#### Prodotti



- 1786 Aura - rotosymmetrical

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated