

Download


- DXF 2D
- d1300.dxf
- 3DS
- 1300_globo.3ds
- 3DM
- 1300_globo.3dm



1300 CL

Diffusers: In vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized, anti-yellowing, injection moulded with a blowing process. These diffusers have optimum transparency for better transmission of the light flux. Available in different colours to change the luminous effect according to the specific environment. Clear and cognac colours/finishes are specifically recommended for systems with gas discharge lamps and accessories (e.g. shutter, etc.), while opal colour/finish has wide-beam properties which reduce glare.

Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP65IK08 degree of protection (bases + globes) according to EN 60529 standards.

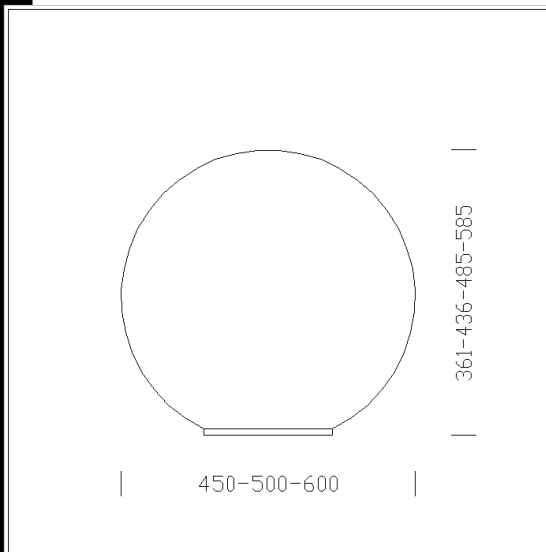

Code	Gear	Kg	Watt	Base	Lamps	Colour
425620-00		1,00				COGNAC
425614-00		2,00				COGNAC
425623-00		1,49				COGNAC