

**Download**

DXF 2D  
- 1305\_6.dxf




**1305 sand blasted silver globe**

Diffusers: In vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized, anti-yellowing, injection moulded with a blowing process. These diffusers have optimum transparency for better transmission of the light flux.

Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP65IK08 degree of protection (bases + globes) according to EN 60529 standards.

To be used with base acc. 1320 and with louver acc. 1328 ø400= max 70W - ø500=max 100W

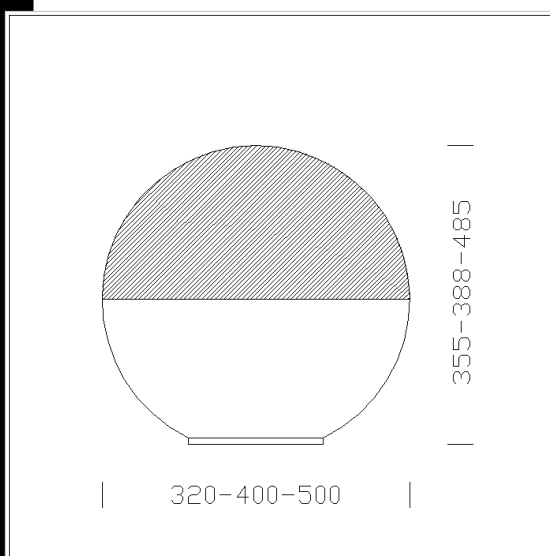

Code	Kg	WTot	Colour
425631-00	3,60	0 W	SANDBLASTED SILVER
425630-00	1,49	0 W	SANDBLASTED SILVER

**Accessori**



- 1326 long ceiling mount



- 1324 suspension unit



- 1327 baffle louver for zone 2



- 1328 baffle louver for zone 3

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated