


1305 sand blasted silver globe special

Diffusers: In vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized, anti-yellowing, injection moulded with a blowing process. These diffusers have optimum transparency for better transmission of the light flux.
 Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP65IK08 degree of protection (bases + globes) according to EN 60529 standards.
 To be used with base acc. 1330 and with louver acc. 1328 ø400= max 70W - ø500=max 100W

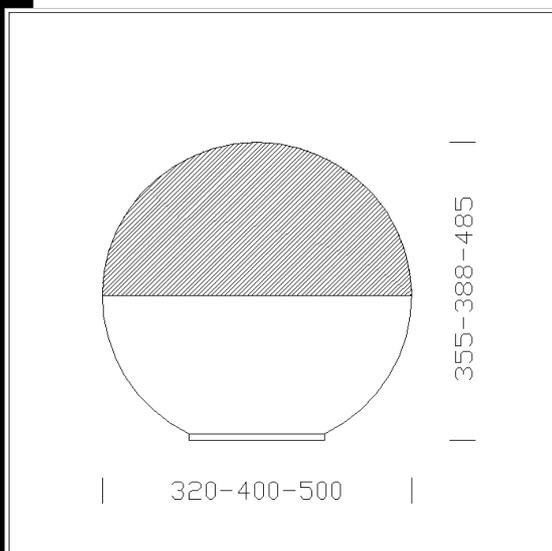

Code	Kg	WTot	Colour
425630-0016	1,20	0 W	SANDBLASTED SILVER
425631-0016	1,40	0 W	SANDBLASTED SILVER


Accessori



- 1327 baffle louvre for zone 2



- 1328 baffle louvre for zone 3



Download
DXF 2D
- 1305_6.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated