


1331 sand blasted silver globe

Diffusers: In vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized, anti-yellowing, injection moulded with a blowing process. These diffusers have optimum transparency for better transmission of the light flux.
Regulations: Produced according to applicable EN60598 -1 CEI 34-21 standards, IP65IK08 degree of protection (bases + globes) according to EN 60529 standards.

To be used with base acc. 1313 and with louver acc. 1329 $\varnothing 4000$ = max 70W - $\varnothing 500$ =max 100W

Download

DXF 2D
- acc 1331_1332 dxf

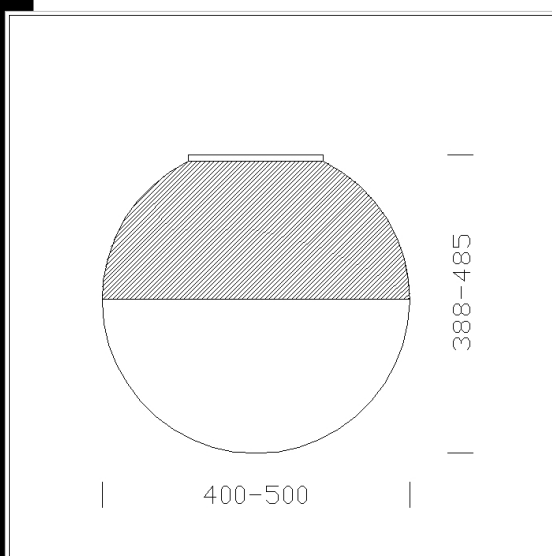

| Code | Kg | WTot | Colour |
|-----------|------|------|--------------------|
| 425640-00 | 1.49 | 0 W | SANDBLASTED SILVER |
| 425641-00 | 3.60 | 0 W | SANDBLASTED SILVER |

Accessories



- 1329 baffle louver



- 1326 long ceiling mount



- 1324 suspension unit

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated