




IP65 IK08

**Download**  
DXF 2D  
- d1320.dxf  
Montaggi  
- 1313-1320-1350-1355-1356-1357  
02-18.pdf







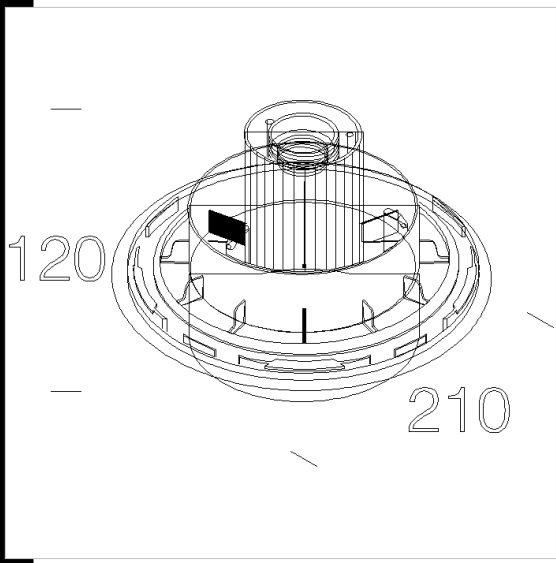









**1320 large base**

In black f.g. nylon.  
Antigripping steel bolts with steel nut built into the base for higher mechanical resistance.  
E27 lampholder, pre-wired with silicone wiring.  
Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection in compliance with EN 60529 standards. It has been granted the ENEC European Certificate of Conformity. Insulation Class II.



Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
426103-00	S	0.46	MAX 100---	0 W	E27	BLACK

**Accessories**

 - 50 Base for acc.5	 - 1464 Corona	 - 1465 flange ø120	 - 1372 wall mount
 - 1377 nylon arm	 - 1370 arm	 - 1362 upward arm	 - 1365 flange ø100
 - 1326 long ceiling mount	 - 1324 suspension unit	 - 1363 downward arm	 - 1463 downward arm
 - 1462 upward arm	 - 1322 skirt		

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated