


1493 pole with base

Hot-dip galvanised steel poles. Equipped with inspection window (186x45mm), removable 4-pole terminal block, max. cross-section 16 sqmm. Supplied with 2 16A safety fuses. With hole for insertion of power supply cable; with holes at different heights according to use. For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased.

Standard insulation class II. When using Insulation Class I fixtures, appropriate grounding connections should be included in the system

Standard insulation class II. When using Insulation Class I fixtures, appropriate grounding connections should be included in the system

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

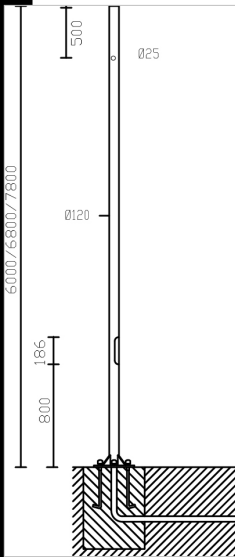

Download

DXF 2D
- 1493.dxf

3DS

- disano_1493_pole_7m.3ds
- disano_1493_pole_6m.3ds
- disano_1493_pole_8m.3ds

3DM

- disano_1493_pole_6m.3dm
- disano_1493_pole_7m.3dm
- disano_1493_pole_8m.3dm

Montaggi

- 1491-1493.pdf
- 1491-1493.pdf

Code	Kg	Colour	Dimension	Aboveground	Underground
426197-00	0.00	GREY9007	0x0x6000 Ø120	6000	
426198-00	0.00	GREY9007	0x0x6800 Ø120	6800	
426199-00	70.00	GREY9007	0x0x7800 Ø120	7800	
426187-00	0.00	GRAPHITE	0x0x6000 Ø120	6000	
426188-00	0.00	GRAPHITE	0x0x6800 Ø120	6800	
426189-00	70.00	GRAPHITE	0x0x7800 Ø120	7800	
426197-00000583	0.00	SANDBLASTE D SILVER	0x0x6000 Ø120	6000	
426198-00000583	0.00	SANDBLASTE D SILVER	0x0x6800 Ø120	6800	
426199-00000583	0.00	SANDBLASTE D SILVER	0x0x7800 Ø120	7800	
426187-00000583	0.00	GRAPHITE	0x0x6000 Ø120	6000	
426188-00000583	0.00	GRAPHITE	0x0x6800 Ø120	6800	
426189-00000583	0.00	GRAPHITE	0x0x7800 Ø120	7800	

Accessories



- 48 wall bracket



- 72 wall mount



- 151 Cube Leone



- 1462 upward arm



- 1473 bent arm



- 222 cover



- 368 union



- 299



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- 296 log-bolts - France only

Products

	- 1668 Brera - LED		- 3223 Sforza LED - asymmetric		- 3270 Stelvio 1 - Plus - LED		- 3273 Stelvio 1 - Plus S - LED
	- 3227 Sforza LED		- 3307 Visconti 8 LED - Amenities		- 3276 Mini Stelvio - asymmetric		- 1680 MiniBrera - LED - street type
	- 3310 Visconti 11 LED		- 3277 Mini Stelvio FX T2 - street type		- 3278 Mini Stelvio FX T3 - light scattering street type		- 3269 Mini Stelvio FX T5 - light scattering
	- 1681 Brera 1 - LED - street type		- 3752 Metropolis - LED		- 3751 Metropolis - LED - wide beam		- 3274 Stelvio 2 - Plus - LED asymmetric
	- 3292 Sella 1 - asymmetrical		- 3293 Sella 1 - Asymmetrical		- 3294 Sella 1 - cycle paths		- 3295 Sella 1 - large areas
	- 3390 Sella 2 - ST		- 3391 Sella 2 - STWB		- 3392 Sella 2 - Asymmetrical		- 3395 Sella 2 - large areas
	- 3375 Mini Stelvio - high		- 3376 Mini Stelvio - high		- 3296 Sella 1 - HP		- 3396 Sella 2 - HP
	- 3393 Sella 2 - Asymmetrical		- 3480 Mini Giovi - high		- 3481 Mini Giovi - high performance - residential		- 3482 Mini Giovi - high
	- 3475 Mini Giovi W1 -		- 3476 Mini Giovi W2 -		- 3477 Mini Giovi N1 - cycleways		- 3478 Mini Giovi M1 - residential
	- 3479 Mini Giovi T4 - large		- 3486 Mini Giovi left (L) - for		- 3487 Mini Giovi right (R) - for		- 3483 Mini Giovi AMBER - large
	- 3484 Mini Giovi AMBER - residential amenities ME		- 3485 Mini Giovi AMBER - cycleways		- 3490 Giovi - high performance - large areas		- 3491 Giovi - high performance - residential amenities ME
	- 3473 Giovi W1 - residential amenities		- 3495 Giovi W2 - residential amenities		- 3472 Giovi M1 - residential amenities		- 3474 Giovi M2 - residential amenities
	- 3496 Giovi - left (L) - for pedestrian crossing		- 3497 Giovi - right (R) - for pedestrian crossing		- 3494 Giovi T4 - asymmetric - large areas		- 3297 Sella 1 - left (L) - for pedestrian crossing
	- 3298 Sella 1 - right (R) - for pedestrian crossing						

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated