

1476 "Aliante" pole with base

Hot galvanised and painted steel poles. Complete with inspection window (239x94mm), with 4-pole and 16mm² maximum cross section removable terminal strip. With 2 16A rated protection fuses. Arranged with the power cable entry hole.

For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased.

Class II insulation as a standard feature. Attention is required when using fixtures with class I insulation since earthing connections must be foreseen.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed


Download

DXF 2D
- 1476.dxf

3DS
- disano_1476_aliante.3ds

3DM
- disano_1476_aliante.3dm

Montaggi
- 1475-1476-400-405-406 01-11.pdf

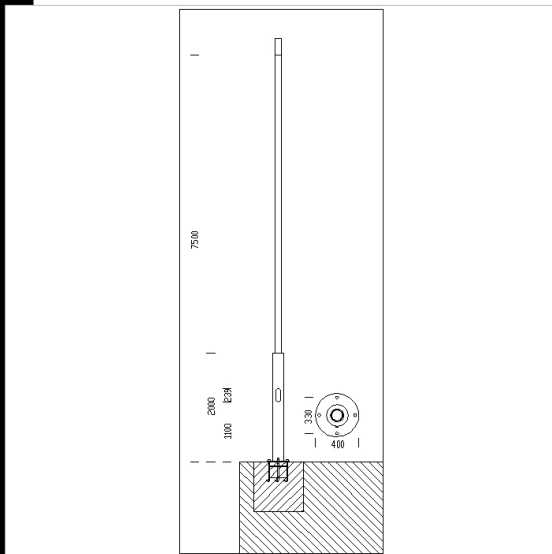

Code	Kg	Colour	Dimension	Aboveground	Underground
426195-00	125.00	GREY9007	0x0x0 ø0		
426190-00	0.00	GALVANIZED	0x0x8000 ø0		
426195-00000583	0.00		400x400x7500 ø193		

Accessories



- 406 Short 'Aliante' arm



- 407 Double 'Aliante' arm



- 450 LED head



- 400 'Aliante' arm

Products



- 3752 Metropolis - LED



- 3751 Metropolis - LED - wide beam

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated