


**1408 fluted ø100 pole with base**


Fluted pole made of extruded aluminium, anodised by 15/20µ thick tin salt electrocoating; graphite or natural oxidised colour.  
 With die-cast inspection window (186x45mm), protective fuse holder, 16A fuse, 4-pole/3-way removable terminal block = 10 sqmm, 2,5 sqmm connection. With hole for insertion of power supply cable. Die-cast aluminium adapter, Ø60 mm. For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased. Standard insulation class II.  
 When using Insulation Class I fixtures, appropriate grounding connections should be included in the system.  
 NOTE: Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1 An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed.

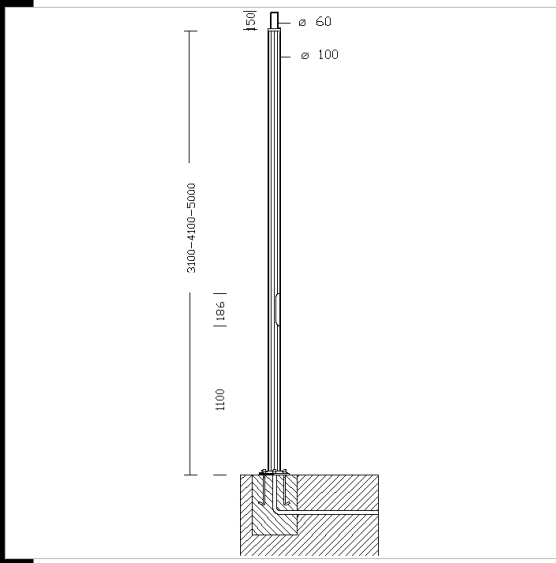

- Download**
- DXF 2D  
- 1408.dxf
  - 3DS  
- disano\_1408\_fluted\_pole\_426324\_00.  
- disano\_1408\_fluted\_pole\_426325\_00.  
- disano\_1408\_fluted\_pole\_426326\_00.  
- disano\_1408\_fluted\_pole\_426337\_00.  
- disano\_1408\_fluted\_pole\_426338\_00.  
- disano\_1408\_fluted\_pole\_426339\_00.  
- disano\_1408\_fluted\_pole\_426345\_00.  
- disano\_1408\_fluted\_pole\_426346\_00.  
- disano\_1408\_fluted\_pole\_426347\_00.
  - 3DM  
- disano\_1408\_fluted\_pole\_426324\_00.  
- disano\_1408\_fluted\_pole\_426325\_00.  
- disano\_1408\_fluted\_pole\_426326\_00.  
- disano\_1408\_fluted\_pole\_426337\_00.  
- disano\_1408\_fluted\_pole\_426338\_00.  
- disano\_1408\_fluted\_pole\_426339\_00.  
- disano\_1408\_fluted\_pole\_426345\_00.  
- disano\_1408\_fluted\_pole\_426346\_00.  
- disano\_1408\_fluted\_pole\_426347\_00.

Code	Kg	Colour	Dimension	Aboveground	Underground
426337-00	12.00	OXIDIZED	3100x0x0 ø100	3100	
426324-00	12.00	GRAPHITE	3100x0x0 ø100	3100	
426339-00	24.00	OXIDIZED	5000x0x0 ø100	5000	
426338-00	18.10	OXIDIZED	4100x0x0 ø100	4100	
426326-00	24.00	GRAPHITE	5000x0x0 ø100	5000	
426325-00	18.10	GRAPHITE	4100x0x0 ø100	4100	
426337-00000583	0.00	OXIDIZED	3100x0x0 ø100	3100	
426339-00000583	0.00	OXIDIZED	5000x0x0 ø100	5000	
426338-00000583	0.00	OXIDIZED	4100x0x0 ø100	4100	
426324-00000583	0.00	GRAPHITE	3100x0x0 ø100	3100	
426325-00000583	0.00	GRAPHITE	4100x0x0 ø100	4100	
426326-00000583	0.00	GRAPHITE	5000x0x0 ø100	5000	

**Accessories**

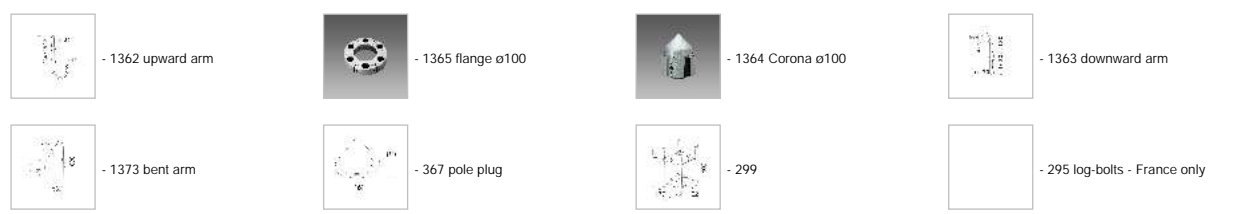

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- 153 Arm connection

Products



- 1513 Torcia LED COB



- 1766 Lanterna LED



- 1667 Brera



- 3197 Montecarlo LED with bracket - cycle lanes



- 3179 Montecarlo Power LED with bracket - light scattering with globe-shaped lenses



- 3194 Sforza LED with bracket - light scattering with elliptical lenses



- 3195 Sforza Power LED with bracket - light scattering with globe-shaped lenses



- 1573 Volo LED wide beam



- 1593 Volo LED - bike trails



- 1778 Musa ESALED Fullcolor



- 3220 Sforza POWERLED



- 3221 Sforza LED asymmetric



- 1517 Clima LED



- 1518 Clima LED against light pollution



- 3196 Sforza LED with bracket - cycle lanes



- 3178 Montecarlo LED with bracket - light scattering with elliptical lenses



- 1335 Globo LED against light



- 1221 Bastia



- 1669 Mini Brera



- 1779 Musa LED



- 1707 Torcia LED



- 3280 Rolle - T1



- 3281 Rolle - T2



- 3282 Rolle - T3



- 3283 Rolle - T4



- 3284 Rolle - T5



- 1570 Clima - LED



- 1205 Polar



- 3355 Garda 5 -



- 3350 Garda 1 -



- 3351 Garda 2 - asymmetric



- 3353 Garda 4 - cycle lanes +



- 3352 Garda 3 - cycle lanes



- Test product



- 3383 Como 1 - rotosymmetrical



- 3384 Como 2 - asymmetric



- 3385 Como 3 - cycle lanes



- 1777 Musa LED bike trails -

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated