

**Download**

DXF 2D  
- 1409.dxf

**3DS**

- disano\_1409\_fluted\_pole\_426327\_00.
- disano\_1409\_fluted\_pole\_426328\_00.
- disano\_1409\_fluted\_pole\_426329\_00.
- disano\_1409\_fluted\_pole\_426334\_00.
- disano\_1409\_fluted\_pole\_426335\_00.
- disano\_1409\_fluted\_pole\_426336\_00.
- disano\_1409\_fluted\_pole\_426340\_00.
- disano\_1409\_fluted\_pole\_426341\_00.
- disano\_1409\_fluted\_pole\_426342\_00.

**3DM**

- disano\_1409\_fluted\_pole\_426327\_00.
- disano\_1409\_fluted\_pole\_426328\_00.
- disano\_1409\_fluted\_pole\_426329\_00.
- disano\_1409\_fluted\_pole\_426334\_00.
- disano\_1409\_fluted\_pole\_426335\_00.
- disano\_1409\_fluted\_pole\_426336\_00.
- disano\_1409\_fluted\_pole\_426340\_00.
- disano\_1409\_fluted\_pole\_426341\_00.
- disano\_1409\_fluted\_pole\_426342\_00.




**1409 fluted pole ø100**

Fluted pole made of extruded aluminium, anodised by 15/20µ thick tin salt electrocoating: graphite or natural oxidised colour.

With die-cast inspection window (186x45mm), protective fuse holder, 16A fuse, 4-pole/3-way removable terminal block = 10 sqmm, 2,5 sqmm connection. With hole for insertion of power supply cable. Die-cast aluminium adapter, Ø60 mm. For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased. Standard insulation class II.

When using Insulation Class I fixtures, appropriate grounding connections should be included in the system.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1 An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed.

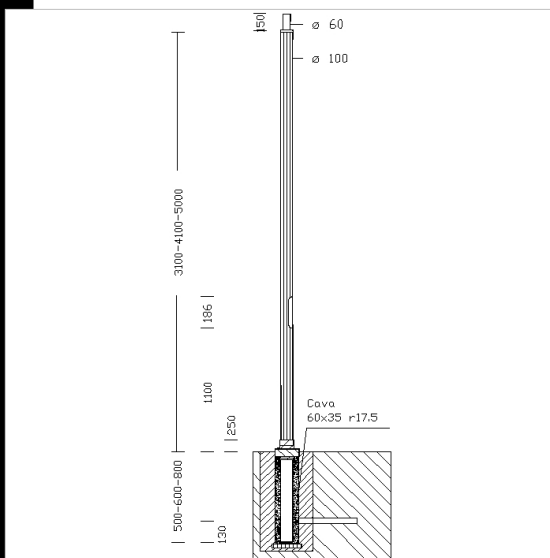


Code	Kg	Colour	Dimension	Aboveground	Underground
426334-00	11.30	OXIDIZED	0x0x3600 ø100	3100	500
426335-00	14.30	OXIDIZED	0x0x4700 ø100	4100	600
426336-00	17.90	OXIDIZED	0x0x5800 ø100	5000	800
426327-00	11.30	GRAPHITE	0x0x3600 ø100	3100	500
426328-00	14.30	GRAPHITE	0x0x4700 ø100	4100	600
426329-00	17.90	GRAPHITE	0x0x5800 ø100	5000	800

**Accessories**





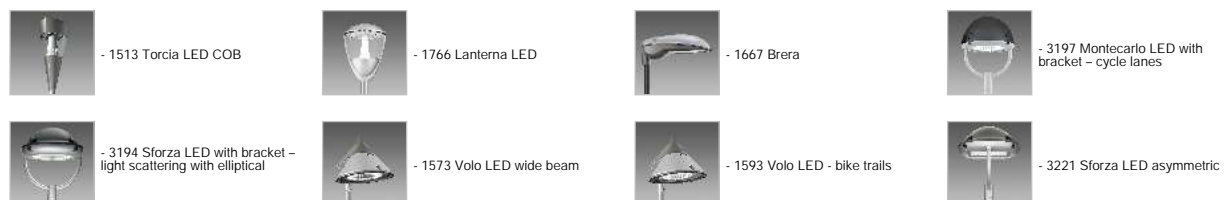






















**Products**



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Products

	- 1517 Clima LED		- 1518 Clima LED against light pollution		- 3196 Sforza LED with bracket - cycle lanes		- 3178 Montecarlo LED with bracket - light scattering with elliptical lenses
	- 1335 Globo LED against light pollution		- 1221 Bastia		- 1669 Mini Brera		- 1779 Musa LED
	- 1707 Torcia LED		- 3280 Rolle - T1		- 3281 Rolle - T2		- 3282 Rolle - T3
	- 3283 Rolle - T4		- 3284 Rolle - T5		- 1570 Clima - LED		- 1205 Polar
	- 3355 Garda 5 - rotosymmetrical		- 3350 Garda 1 - rotosymmetrical		- 3351 Garda 2 - asymmetric		- 3353 Garda 4 - cycle lanes + street type
	- 3352 Garda 3 - cycle lanes		- 3383 Como 1 - rotosymmetrical		- 3384 Como 2 - asymmetric		- 3385 Como 3 - cycle lanes
	- 1777 Musa LED bike trails -						

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated