



1510 Ambrosiano Mast

Made with inner core in steel and cubic external finishing in cast iron. Complete with cast iron base.

Made in five superimposed blocks.

Warning: check the technical drawing for size of plinth.

NOTE: Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed


Download

DXF 2D
- 1510.dxf

3DS
- 1510_palo_ambrosiano.3ds

3DM
- 1510_palo_ambrosiano.3dm

Montaggi
- ambr_2.dxf
- ambr_6.dxf
- ambr_1.dxf
- ambr_5.dxf
- ambr_3.dxf

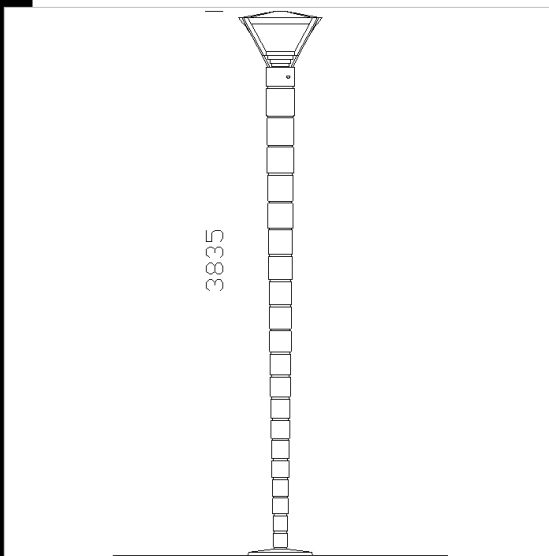

Code	Kg	Colour	Dimension	Aboveground	Underground
426361-00	0.00	GREY	0x0x0 ø0		
426359-00	210.00	GRAPHITE	0x0x0 ø0		
426360-00	210.00	GREY	0x0x0 ø0		

Products



- 1583 Vista LED COB



- 1583 Vista - FX

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated