

1508 fluted pole ø120 with base


Fluted pole made of extruded aluminium, anodised by 15/20µ thick tin salt electrocoating; graphite or natural oxidised colour.

With die-cast inspection window (186x45mm), protective fuse holder, 16A fuse, 4-pole/3-way=10mm², derivation 2,5 sqmm, removable terminal block = 6 sqmm, 4 sqmm connection. With hole for insertion of power supply cable. Die-cast aluminium adapter, Ø60 mm.

For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased. Standard insulation class II.

When using Insulation Class I fixtures, appropriate earthing connections should be included in the system.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1 An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed.

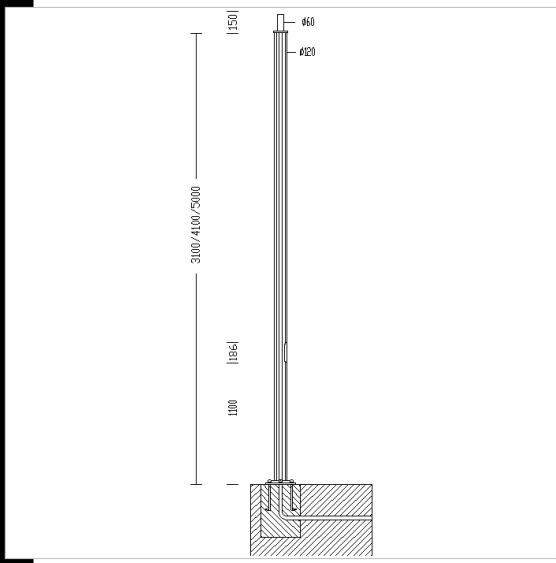

Download

DXF 2D
- 1508.dxf

3DS

- disano_1508_fluted_pole_426355_00.
- disano_1508_fluted_pole_426356_00.
- disano_1508_fluted_pole_426357_00.
- disano_1508_fluted_pole_426362_00.
- disano_1508_fluted_pole_426363_00.
- disano_1508_fluted_pole_426364_00.
- disano_1508_fluted_pole_426379_00.
- disano_1508_fluted_pole_426378_00.
- disano_1508_fluted_pole_426377_00.

3DM

- disano_1508_fluted_pole_426355_00.
- disano_1508_fluted_pole_426356_00.
- disano_1508_fluted_pole_426357_00.
- disano_1508_fluted_pole_426362_00.
- disano_1508_fluted_pole_426363_00.
- disano_1508_fluted_pole_426364_00.
- disano_1508_fluted_pole_426379_00.
- disano_1508_fluted_pole_426378_00.
- disano_1508_fluted_pole_426377_00.

Montaggi

- finestra.dxf

Code	Kg	Colour	Dimension	Aboveground	Underground
426377-00	21.20	OXIDIZED	3100x0x0 ø120	3100	
426378-00	25.80	OXIDIZED	4100x0x0 ø120	4100	
426363-00	25.80	GRAPHITE	4100x0x0 ø120	4100	
426362-00	21.20	GRAPHITE	3100x0x0 ø120	3100	
426364-00	29.90	GRAPHITE	5000x0x0 ø120	5000	
426379-00	29.90	OXIDIZED	5000x0x0 ø120	5000	
426364-00000583	0.00	GRAPHITE	5000x0x0 ø120	5000	
426362-00000583	0.00	GRAPHITE	3100x0x0 ø120	3100	
426377-00000583	0.00	OXIDIZED	3100x0x0 ø120	3100	
426379-00000583	0.00	OXIDIZED	5000x0x0 ø120	5000	
426363-00000583	0.00	GRAPHITE	4100x0x0 ø120	4100	
426378-00000583	0.00	OXIDIZED	4100x0x0 ø120	4100	

Accessories



The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Accessories



- 299



- 295 log-bolts - France only



- 153 Arm connection

Products



- 3134 Tex - LED



- 1513 Torcia LED COB



- 1766 Lanterna LED



- 1667 Brera



- 3197 Montecarlo LED with bracket - cycle lanes



- 3194 Sforza LED with bracket - light scattering with elliptical lenses



- 1573 Volo LED wide beam



- 1593 Volo LED - bike trails



- 1668 Brera - LED



- 3221 Sforza LED asymmetric



- 1517 Clima LED



- 3223 Sforza LED - asymmetric



- 3142 Campana LED



- 1518 Clima LED against light pollution



- 3196 Sforza LED with bracket - cycle lanes



- 3178 Montecarlo LED with bracket - light scattering with elliptical lenses



- 3270 Stelvio 1 - Plus - LED



- 1512 Bastia - LED



- 3273 Stelvio 1 - Plus S - LED



- 3227 Sforza LED



- 1221 Bastia



- 1669 Mini Brera



- 3141 Campana LED



- 3307 Visconti 8 LED -



- 3275 Mini Stelvio - street type



- 3276 Mini Stelvio - asymmetric



- 1680 Mini Brera - LED - street



- 3310 Visconti 11 LED



- 1707 Torcia LED



- 3280 Rolle - T1



- 3277 Mini Stelvio FX T2 - street



- 3278 Mini Stelvio FX T3 - light



- 3269 Mini Stelvio FX T5 - light



- 3281 Rolle - T2



- 3282 Rolle - T3



- 3283 Rolle - T4



- 3284 Rolle - T5



- 1570 Clima - LED



- 1681 Brera 1 - LED - street



- 3752 Metropolis - LED



- 3751 Metropolis - LED - wide beam



- 1205 Polar



- 3274 Stelvio 2 - Plus - LED asymmetric



- 3355 Garda 5 - rotosymmetrical



- 3350 Garda 1 - rotosymmetrical



- 3351 Garda 2 - asymmetric



- 3353 Garda 4 - cycle lanes + street type



- 3352 Garda 3 - cycle lanes



- 3290 Sella 1 - ST



- 3291 Sella 1 - STWB



- 3292 Sella 1 - asymmetrical 45°



- 3293 Sella 1 - Asymmetrical 60°



- 3294 Sella 1 - cycle paths



- 3295 Sella 1 - large areas



- 3390 Sella 2 - ST



- 3391 Sella 2 - STWB



- 3392 Sella 2 - Asymmetrical 45°



- 3395 Sella 2 - large areas



- 3375 Mini Stelvio - high performance - street type



- 3376 Mini Stelvio - high performance - large areas



- 3296 Sella 1 - HP



- 3396 Sella 2 - HP



- 3383 Como 1 - rotosymmetrical



- 3384 Como 2 - asymmetric

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Products

	- 3385 Como 3 - cycle lanes		- 3393 Sella 2 - Asymmetrical 60°		- 3480 Mini Giovi - high performance - large areas		- 3481 Mini Giovi - high performance - residential amenities ME
	- 3482 Mini Giovi - high performance - cycleways		- 3475 Mini Giovi W1 - residential amenities		- 3476 Mini Giovi W2 - residential amenities		- 3477 Mini Giovi N1 - cycleways
	- 3478 Mini Giovi M1 - residential amenities		- 3479 Mini Giovi T4 - large areas		- 3486 Mini Giovi left (L) - for pedestrian crossing		- 3487 Mini Giovi right (R) - for pedestrian crossing
	- 3483 Mini Giovi AMBER - large areas		- 3484 Mini Giovi AMBER - residential amenities ME		- 3485 Mini Giovi AMBER - cycleways		- 3490 Giovi - high performance - large areas
	- 3491 Giovi - high performance - residential amenities ME		- 3473 Giovi W1 - residential amenities		- 3495 Giovi W2 - residential amenities		- 3472 Giovi M1 - residential amenities
	- 3474 Giovi M2 - residential amenities		- 3496 Giovi - left (L) - for pedestrian crossing		- 3497 Giovi - right (R) - for pedestrian crossing		- 3494 Giovi T4 - asymmetric - large areas
	- 3297 Sella 1 - left (L) -for		- 3298 Sella 1 - right (R) -for				

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated