

IK08

Download

DXF 2D
- 1350n.dxf

Montaggi
- 1313-1320-1350-1355-1356-1357
02-18.pdf



1350 sferico


Globe: Spherical diffuser in vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized.

Base: in black f.g. nylon

Lampholder: In ceramics, already silicone wired and connected to the terminal fixed in the base. Socket E27.

Mounting: On pole or arm with 60 mm diam. connector.

Equipment: anti-gripping steel bolts with steel nut built into the base for higher mechanical resistance.

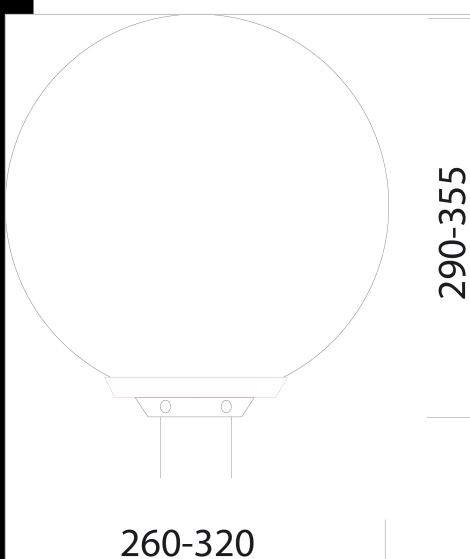

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
426705-00	S	1,10	MAX 60---	0 W	E27	OPAL
426706-00	S	1,10	MAX 60---	0 W	E27	COGNAC
426700-00	S	0,80	MAX 40---	0 W	E27	TRANSPARENT
426702-00	S	0,80	MAX 40---	0 W	E27	COGNAC
426704-00	S	1,10	MAX 60---	0 W	E27	TRANSPARENT
426701-00	S	0,82	MAX 40---	0 W	E27	OPAL

Accessori



- 1377 nylon arm



- 1373 bent arm



- 1370 arm

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated