

Download

DXF 2D
- 1415.dxf
Montaggi
- 1415-1416 01-17.pdf




1415 pole with base ø159

Hot-dip galvanised steel poles.

With die-cast inspection window (186x45mm), 2 protection fuse holders, 2 fuses, 16A, 4-pole/3-way removable terminal block = 10 sqmm, 2,5 sqmm connection. With hole for insertion of power supply cable. For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased. Standard insulation class II.

When using Insulation Class I fixtures, appropriate grounding connections should be included in the system.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

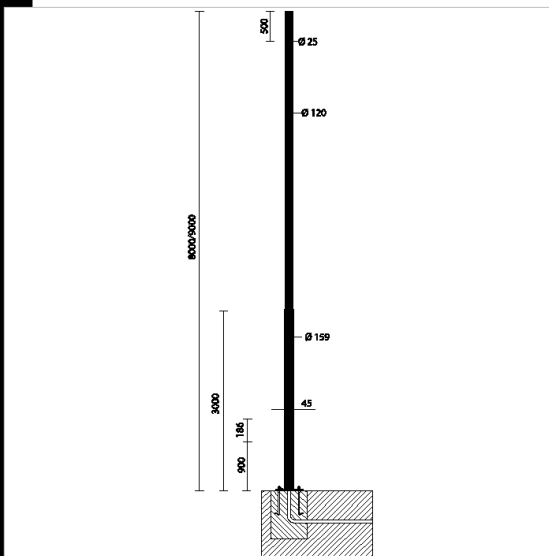

Code	Kg	Colour	Dimension	Aboveground	Underground
426740-00	30.00	GREY9007	8000x0x0 ø159	8000	
426741-00	122.00	GRAPHITE	8000x0x0 ø159	8000	0
426743-00	123.10	GRAPHITE	9000x0x0 ø159	9000	
426742-00	120.00	GREY9007	9000x0x0 ø159	9000	0

Accessories



- 368 union



- 223 cover



- 450 LED head



- 299

Products



- 3134 Tex - LED



- 1680 MiniBrera - LED - street type



- 1681 Brera 1 - LED - street type



- 3752 Metropolis - LED



- 3751 Metropolis - LED - wide beam

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated