
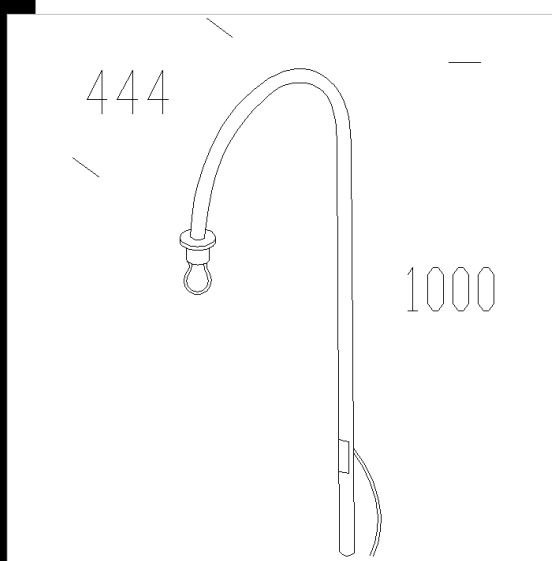


1373 bent arm

Composed of a spacer and a base in die-cast aluminium, epoxy cationic electrocoating, black and rough finish. Provides installation poles and wall. To be used with art. 1555 Brera and art. 1559 Siena.

Download

- DXF 2D
- 1373.dxf
- 3DS
- disano_1373.3ds
- 3DM
- disano_1373.3dm

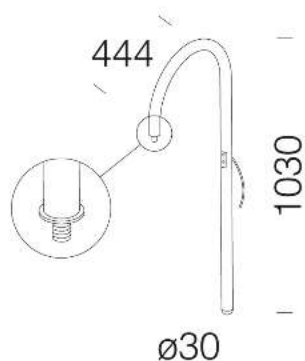

Code	Kg	WTot	Colour
426905-00	1,00	0 W	BLACK
426920-00	1,50	0 W	GREY9007

Pali



- 1408 fluted ø100 pole with



- 1409 fluted pole ø100

Prodotti



- 3124 Ghost - direct and indirect light



- 3172 Montecarlo



- 3174 Montecarlo with glass



- 3114 Ghost - direct and indirect light



- 3171 Montecarlo - asymmetric



- 3175 Montecarlo LED - wide beam - elliptical lenses



- 1517 Clima LED



- 1518 Clima LED against light pollution



- 1512 Bastia - LED



- 1350 sferico

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated