


304 threaded connection

Threaded connection to be used with acc. 301 for product installation.

Download
DXF 2D
- acc 304.dxf

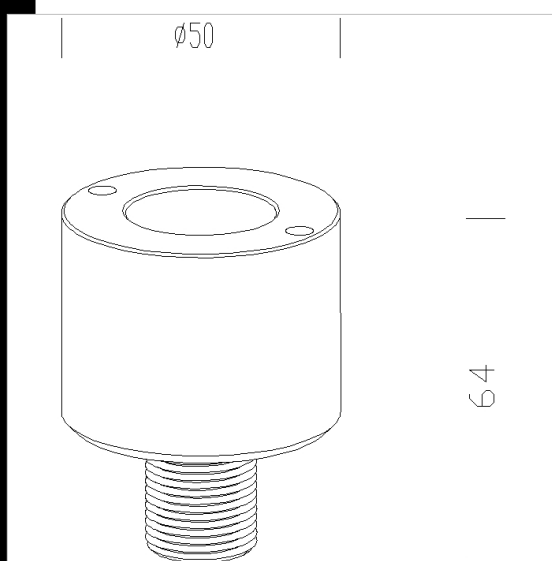

Code	Kg	WTot	Colour
426978-00	0,55	0 W	GALVANIZED

Prodotti



- 3131 Tex medium beam



- 3124 Ghost - direct and indirect



- 3172 Montecarlo



- 3174 Montecarlo with glass



- 3136 Campana - Wide beam



- 3137 Campana



- 3132 Tex wide beam



- 3114 Ghost - direct and indirect light



- 3171 Montecarlo - asymmetric



- 3175 Montecarlo LED - wide beam - elliptical lenses



- 3142 Campana LED



- 3141 Campana LED



- 3146 Campana LED

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated