



1543 Cono



Housing: In vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized.  
 Diffuser: In anti-glare, vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized, smooth outside, dustproof.  
 Reflector: In polished aluminium and white polycarbonate.  
 Lampholder: In polycarbonate, phosphor bronze contacts. Socket G23; E27.  
 Electric gear: 230V/50Hz power supply. Hard wire 0.75 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards or hard silicone wire with glass braid, 0.75 sqmm cross-section. 2P or 2P+T terminal block with maximum allowed lead cross-section of 2.5 sqmm.  
 Equipment: Gasket in environment-friendly material. Cable gland in fiber glass nylon Ø 1/2 gas thread (cable min. Ø 9 max. Ø 12).  
 Regulations: Produced according to applicable IEC 598 - CEI 34 - 21 standards, IP65 degree of protection according to EN 60529 standards. Double insulation.

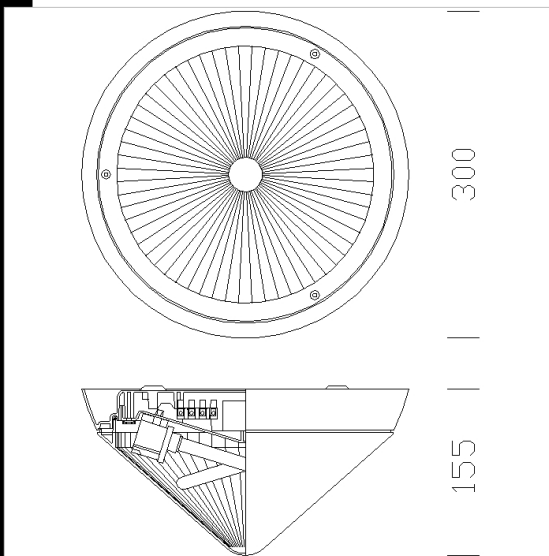

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
427146-00	S	0,69	INC 100-1380lm-2700K-Ra 100	100 W	E27	GREY
427147-08	CELL	0,92	FLC 2x9S-600lm-4000k-Ra 1b	19 W	G23	GREY

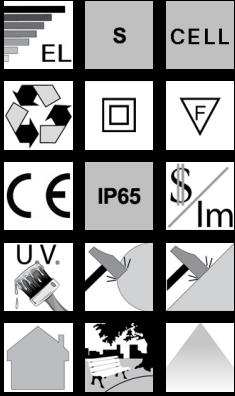

IK08

Download

DXF 2D  
- 1543con.dxf

Montaggi  
- cono globo.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated